



350

Hydraulic Excavator

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

Specifications	2
Engine	2
Swing Mechanism	2
Weights	2
Track	2
Drive	2
Hydraulic System	2
Service Refill Capacities	2
Standards	2
Sound Performance	3
Air Conditioning System	3
Operating Weights and Ground Pressures	3
Major Component Weights	4
Dimensions	5
Working Ranges	9
Reach Boom Lift Capacities	11
Mass Boom Lift Capacities	20
Bucket Specifications and Compatibility:	
Africa, Middle East (Afr-ME) and Commonwealth of Independent States (CIS)	23
Australia and New Zealand (ANZ)	24
South America (S Am)	25
Southeast Asia (SE Asia)	26
Attachments Offering Guide:	
Africa, Middle East (Afr-ME)	27
Commonwealth of Independent States (CIS)	31
Australia and New Zealand (ANZ)	35
South America (S Am)	36
Southeast Asia (SE Asia)	37
Typical Pass Match Guide	38
Standard and Optional Equipment	39
Dealer Installed Kits and Attachments	41
Cab Options	42

350 Hydraulic Excavator Specifications

Engine

Engine Model	Cat® C9.3B	
Net Power		
ISO 9249	309 kW	414 hp
ISO 9249 (DIN)	420 PS	
Engine Power		
ISO 14396	310 kW	416 hp
ISO 14396 (DIN)	421 PS	
Bore	115 mm	5 in
Stroke	149 mm	6 in
Displacement	9.3 L	568 in ³
Biodiesel Capability	Up to B20 ⁽¹⁾	

- Meets U.S. EPA Tier 3, EU Stage IIIA equivalent, and China Nonroad Stage III emission standards, equivalent to U.S. EPA Tier 3 and EU Stage IIIA.
- Recommended for use up to 4500 m (14,760 ft) altitude with engine power derate above 3000 m (9,840 ft).
- Advertised power is tested per the specified standard in effect at the time of manufacture.
- Net power advertised is the power available at the flywheel when the engine is equipped with fan, air intake system, exhaust system and alternator.
- Engine speed at 1,800 rpm.

⁽¹⁾Cat engines are compatible with diesel fuel blended with following lower-carbon intensity fuels up to:

- ✓ 100% biodiesel FAME (fatty acid methyl ester)*
- ✓ 100% renewable diesel, HVO (hydrogenated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

*For use of blends higher than 20% biodiesel, consult your Cat dealer.

Swing Mechanism

Swing Speed	7.94 rpm	
Maximum Swing Torque	189 kN·m	139,275 lbf·ft

Weights

Operating Weight	47 600 kg	104,900 lb
------------------	-----------	------------

- Mass boom, M3.0UB (9'10") stick, SD 3.2 m³ (4.2 yd³) bucket, and 600 mm (24") double grouser shoes, Long Undercarriage.

Track

Standard Track Shoes Width	600 mm	24 in
Optional Track Shoes Width	750 mm	30 in
Optional Track Shoes Width	900 mm	35 in
Number of Shoes (each side)	52	
Number of Track Rollers (each side)	9	
Number of Carrier Rollers (each side)	2	

Drive

Maximum Gradeability	35°/70%	
Maximum Travel Speed	4.5 km/h	2.8 mph
Maximum Drawbar Pull	352 kN	79,088 lbf

Hydraulic System

Main System – Maximum Flow – Implement	779 L/min (389 × 2 pumps)	206 gal/min (103 × 2 pumps)
Maximum Pressure – Equipment – Implement	35 000 kPa	5,076 psi
Maximum Pressure – Travel	35 000 kPa	5,076 psi
Maximum Pressure – Swing	25 700 kPa	3,727 psi
Boom Cylinder – Bore	160 mm	6 in
Boom Cylinder – Stroke	1575 mm	62 in
Stick Cylinder – Bore	190 mm	7 in
Stick Cylinder – Stroke	1758 mm	69 in
TB Bucket Cylinder – Bore	160 mm	6 in
TB Bucket Cylinder – Stroke	1356 mm	53 in
UB Bucket Cylinder – Bore	170 mm	7 in
UB Bucket Cylinder – Stroke	1396 mm	55 in

Service Refill Capacities

Fuel Tank Capacity	680 L	179.6 gal
Cooling System	48 L	12.7 gal
Engine Oil (with filter)	32 L	8.5 gal
Swing Drive	15 L	4.0 gal
Final Drive (each)	11 L	2.9 gal
Hydraulic System (including tank)	550 L	145.3 gal
Hydraulic Tank (including suction pipe)	217 L	57.3 gal

Standards

Brakes	ISO 10265:2008
Cab/Falling Object Guard System (FOGS)	ISO 10262:1998 Level II
Cab/Rollover Protective Structure (ROPS)	ISO 12117-2:2008

350 Hydraulic Excavator Specifications

Sound Performance

ISO 6395 (external) 107 dB(A)

ISO 6396 (inside cab) 75 dB(A)

- When properly installed and maintained, the cab offered by Caterpillar, when tested with doors and windows closed according to ANSI/SAE J1166 OCT98, meets OSHA and MSHA requirements for operator sound exposure limits in effect at time of manufacture.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.00 kg of refrigerant which has a CO₂ equivalent of 1.430 metric tonne.

Operating Weights and Ground Pressures

Base Machine Configurations	600 mm (24") Double Grouser Shoes		600 mm (24") Double Grouser Shoes		750 mm (30") Double Grouser Shoes		750 mm (30") Triple Grouser Shoes		900 mm (35") Triple Grouser Shoes	
	Weight kg (lb)	Ground Pressure kPa (psi)	Weight kg (lb)	Ground Pressure kPa (psi)	Weight kg (lb)	Ground Pressure kPa (psi)	Weight kg (lb)	Ground Pressure kPa (psi)	Weight kg (lb)	Ground Pressure kPa (psi)
Long Undercarriage										
Reach Boom + R3.9 m (12'10") TB Stick + 2.41 m ³ (3.15 yd ³) SD Bucket	46 700 (103,000)	80.9 (11.7)	47 300 (104,400)	81.9 (11.9)	47 500 (104,700)	65.9 (9.6)	47 400 (104,400)	65.7 (9.5)	48 100 (106,100)	55.7 (8.1)
Reach Boom + R3.35 m (11'0") TB Stick + 2.7 m ³ (3.6 yd ³) SD Bucket	46 700 (103,000)	80.9 (11.7)	47 300 (104,400)	81.9 (11.9)	47 500 (104,800)	65.9 (9.6)	47 400 (104,400)	65.7 (9.5)	48 100 (106,100)	55.7 (8.1)
Reach Boom + R2.9 m (9'6") TB Stick + 2.7 m ³ (3.6 yd ³) SD Bucket	46 700 (102,900)	80.8 (11.7)	47 300 (104,300)	81.9 (11.9)	47 500 (104,700)	65.9 (9.6)	47 300 (104,300)	65.7 (9.5)	48 100 (106,000)	55.6 (8.1)
Mass Boom + M3.0 m (9'10") UB Stick + 3.2 m ³ (4.2 yd ³) SD Bucket	47 600 (104,900)	82.4 (12.0)	48 200 (106,300)	83.4 (12.1)	48 400 (106,700)	67.1 (9.7)	48 200 (106,300)	66.9 (9.7)	49 000 (108,000)	56.7 (8.2)
Mass Boom + M2.5 m (8'2") UB Stick + 3.2 m ³ (4.2 yd ³) SD Bucket	47 400 (104,400)	82.0 (11.9)	48 000 (105,800)	83.1 (12.0)	48 200 (106,200)	66.8 (9.7)	48 000 (105,900)	66.6 (9.7)	48 800 (107,600)	56.4 (8.2)

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.

350 Hydraulic Excavator Specifications


Major Component Weights

	kg	lb
Base Machine Weight (with upperframe, undercarriage, counterweight, boom cylinders – does not include boom, stick, bucket, stick cylinder, bucket cylinder, tracks, fuel, operator)		
With Counterweight, Swing Frame, Base Frame with Track Rollers and Carrier Rollers for Long Undercarriage	30 980	68,290
Track Shoes:		
600 mm (24") Width, 15.5 mm (0.6") Thick, Double Grouser (PPR3) Track Shoes	5270	11,610
600 mm (24") Width, 19.5 mm (0.8") Thick, Double Grouser (PPR2) Track Shoes	5880	12,960
750 mm (30") Width, 15.5 mm (0.6") Thick, Double Grouser (PPR3) Track Shoes	6060	13,360
750 mm (30") Width, 15.5 mm (0.6") Thick, Triple Grouser (PPR3) Track Shoes	5910	13,030
900 mm (35") Width, 15.5 mm (0.6") Thick, Triple Grouser (PPR3) Track Shoes	6680	14,720
Two Boom Cylinders	760	1,680
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	630	1,380
Counterweight	9000	19,840
Swing Frame	4140	9,120
Long and Long Narrow Undercarriage:		
Base Frame with Track Rollers and Carrier Rollers	10 680	23,540
Booms (including lines, pins, stick cylinder):		
Reach Boom 6.9 m (22'8")	4540	10,000
Mass Boom 6.55 m (21'6")	4820	10,630
Sticks (including lines, pins, bucket cylinder, bucket linkage):		
Reach Stick R3.9TB (12'10")	2650	5,850
Reach Stick R3.35TB (11'0")	2480	5,470
Reach Stick R2.9TB (9'6")	2430	5,360
Mass Stick M3.0UB (9'10")	2940	6,480
Mass Stick M2.5UB (8'2")	2720	5,990
Buckets (without linkage):		
2.41 m ³ (3.15 yd ³) SD	2670	5,880
2.7 m ³ (3.6 yd ³) SD	2850	6,270
3.2 m ³ (4.2 yd ³) SD	2970	6,540
Quick Couplers:		
CW Dedicated QC	760	1,660
Pin Grabber QC	950	2,090

350 Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate and may vary depending on bucket selection.

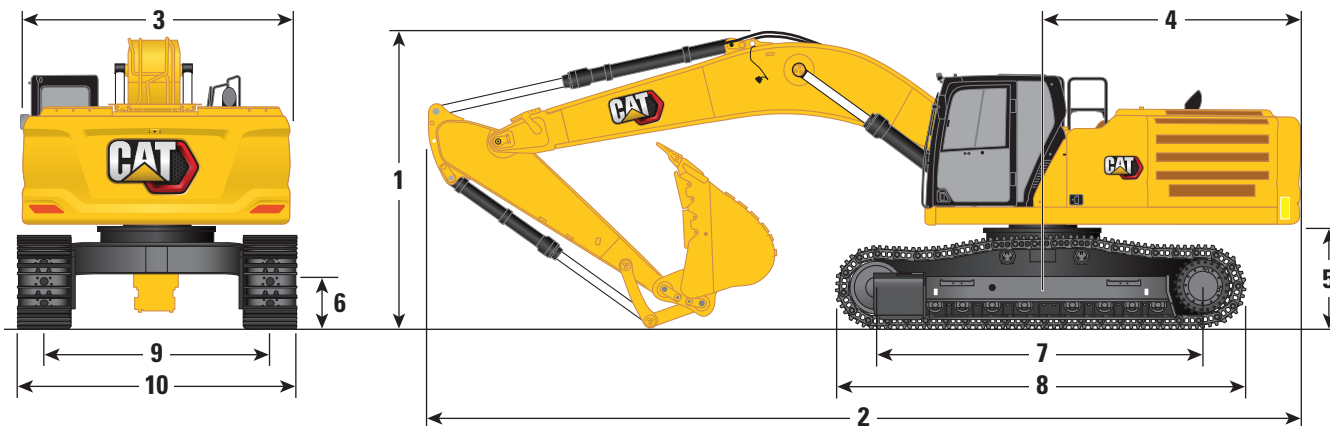

Boom Options

Reach Boom
6.9 m (22'8")

Stick Options

R3.9TB (12'10")

Reach Stick
R3.35TB (11'0")

R2.9TB (9'6")

1 Machine Height:

	R3.9TB (12'10")	R3.9TB (12'10")	Reach Stick R3.35TB (11'0")	Reach Stick R3.35TB (11'0")	R2.9TB (9'6")	R2.9TB (9'6")
Cab Height	3260 mm	10'8"	3260 mm	10'8"	3260 mm	10'8"
FOGS Height	3400 mm	11'2"	3400 mm	11'2"	3400 mm	11'2"
Guardrails/Handrails Height	3400 mm	11'2"	3400 mm	11'2"	3400 mm	11'2"
With Boom/Stick/Bucket Installed	3700 mm	12'2"	3590 mm	11'9"	3890 mm	12'9"
With Boom/Stick Installed	3700 mm	12'2"	3530 mm	11'7"	3440 mm	11'3"
With Boom Installed	3110 mm	10'2"	3110 mm	10'2"	3110 mm	10'2"
With Boom/Stick/Bucket Installed (with auxiliary lines)	3700 mm	12'2"	3590 mm	11'9"	3890 mm	12'9"
With Boom/Stick Installed (with auxiliary lines)	3700 mm	12'2"	3530 mm	11'7"	3440 mm	11'3"
With Boom Installed (with auxiliary lines)	3110 mm	10'2"	3110 mm	10'2"	3110 mm	10'2"

2 Machine Length:

With Boom/Stick/Bucket Installed	11 950 mm	39'2"	11 880 mm	39'0"	11 890 mm	39'0"
With Boom/Stick Installed	11 950 mm	39'2"	11 860 mm	38'11"	11 830 mm	38'10"
With Boom Installed	10 630 mm	34'11"	10 630 mm	34'11"	10 630 mm	34'11"
With Boom/Stick/Bucket Installed (with auxiliary lines)	11 950 mm	39'2"	11 880 mm	39'0"	11 890 mm	39'0"
With Boom/Stick Installed (with auxiliary lines)	11 950 mm	39'2"	11 860 mm	38'11"	11 830 mm	38'10"
With Boom Installed (with auxiliary lines)	10 630 mm	34'11"	10 630 mm	34'11"	10 630 mm	34'11"

3 Upperframe Width without Walkways

3 Upperframe Width without Walkways	3020 mm	9'11"	3020 mm	9'11"	3020 mm	9'11"
-------------------------------------	---------	-------	---------	-------	---------	-------

4 Tail Swing Radius

4 Tail Swing Radius	3760 mm	12'4"	3760 mm	12'4"	3760 mm	12'4"
---------------------	---------	-------	---------	-------	---------	-------

5 Counterweight Clearance

5 Counterweight Clearance	1340 mm	4'5"	1340 mm	4'5"	1340 mm	4'5"
---------------------------	---------	------	---------	------	---------	------

6 Ground Clearance

6 Ground Clearance	520 mm	1'8"	520 mm	1'8"	520 mm	1'8"
--------------------	--------	------	--------	------	--------	------

Bucket Type


	SD		SD		SD	
Bucket Capacity	2.41 m ³	3.15 yd ³	2.70 m ³	3.60 yd ³	2.70 m ³	3.60 yd ³
Bucket Tip Radius	1920 mm	6'4"	1920 mm	6'4"	1920 mm	6'4"

(continued on next page)

350 Hydraulic Excavator Specifications

Dimensions *(continued)*

All dimensions are approximate and may vary depending on bucket selection.

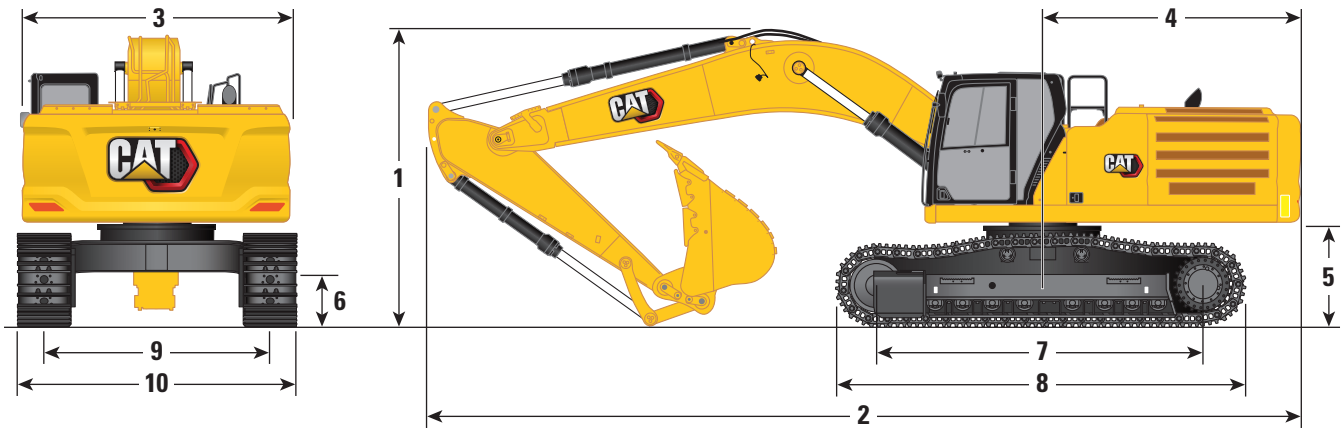

Boom Options

Reach Boom
6.9 m (22'8")

Stick Options

R3.9TB (12'10")

Reach Stick
R3.35TB (11'0")

R2.9TB (9'6")


	R3.9TB (12'10")		Reach Stick R3.35TB (11'0")		R2.9TB (9'6")	
7 Track Length – Length to Center of Rollers (long undercarriage)	4360 mm	14'4"	4360 mm	14'4"	4360 mm	14'4"
8 Track Length (long undercarriage)	5400 mm	17'9"	5400 mm	17'9"	5400 mm	17'9"
9 Track Gauge – Extended	2740 mm	9'0"	2740 mm	9'0"	2740 mm	9'0"
Track Width – Extended:						
600 mm (24") Shoes	3340 mm	10'11"	3340 mm	10'11"	3340 mm	10'11"
750 mm (30") Shoes	3490 mm	11'5"	3490 mm	11'5"	3490 mm	11'5"
900 mm (35") Shoes	3640 mm	11'11"	3640 mm	11'11"	3640 mm	11'11"
10 Undercarriage Width (with steps) – Extended:						
600 mm (24") Shoes	3350 mm	11'0"	3350 mm	11'0"	3350 mm	11'0"
750 mm (30") Shoes	3500 mm	11'6"	3500 mm	11'6"	3500 mm	11'6"
900 mm (35") Shoes	3640 mm	11'11"	3640 mm	11'11"	3640 mm	11'11"
Bucket Type	SD		SD		SD	
Bucket Capacity	2.41 m ³	3.15 yd ³	2.70 m ³	3.60 yd ³	2.70 m ³	3.60 yd ³
Bucket Tip Radius	1920 mm	6'4"	1920 mm	6'4"	1920 mm	6'4"

(continued on next page)

350 Hydraulic Excavator Specifications

Dimensions (continued)

All dimensions are approximate and may vary depending on bucket selection.

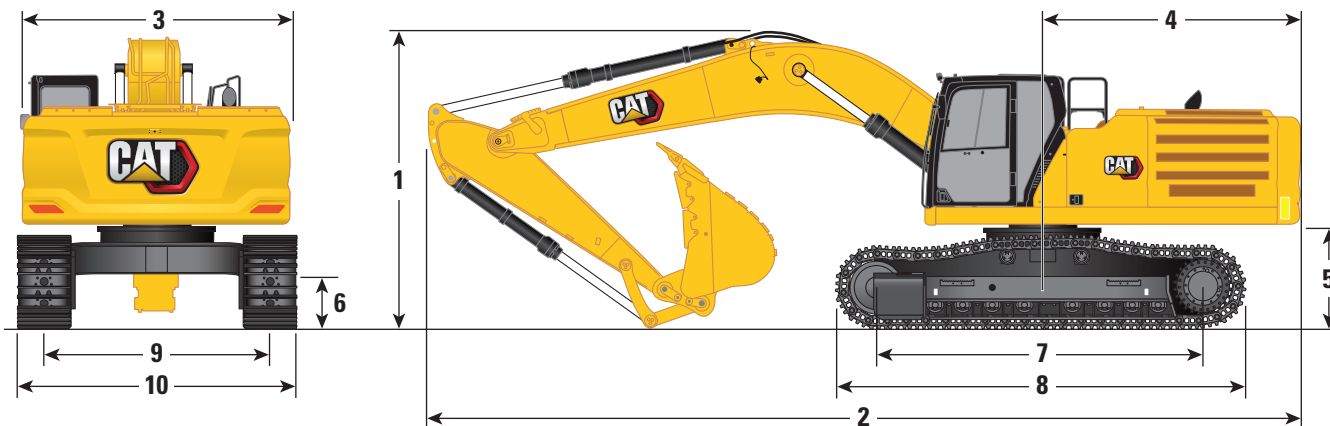

Boom Options

Mass Boom
6.55 m (21'6")

Stick Options

Mass Stick
M3.0UB (9'10") **M2.5UB (8'2")**


	M3.0UB (9'10")		M2.5UB (8'2")	
1 Machine Height:				
Cab Height	3260 mm	10'8"	3260 mm	10'8"
FOGS Height	3400 mm	11'2"	3400 mm	11'2"
Guardrails/Handrails Height	3400 mm	11'2"	3400 mm	11'2"
With Boom/Stick/Bucket Installed	4220 mm	13'10"	4340 mm	14'3"
With Boom/Stick Installed	3780 mm	12'5"	3530 mm	11'7"
With Boom Installed	3190 mm	10'6"	3190 mm	10'6"
With Boom/Stick/Bucket Installed (with auxiliary lines)	4220 mm	13'10"	4340 mm	14'3"
With Boom/Stick Installed (with auxiliary lines)	3780 mm	12'5"	3530 mm	11'7"
With Boom Installed (with auxiliary lines)	3190 mm	10'6"	3190 mm	10'6"
2 Machine Length:				
With Boom/Stick/Bucket Installed	11 630 mm	38'2"	11 830 mm	38'10"
With Boom/Stick Installed	11 510 mm	37'9"	11 580 mm	38'0"
With Boom Installed	10 270 mm	33'8"	10 270 mm	33'8"
With Boom/Stick/Bucket Installed (with auxiliary lines)	11 630 mm	38'2"	11 830 mm	38'10"
With Boom/Stick Installed (with auxiliary lines)	11 510 mm	37'9"	11 580 mm	38'0"
With Boom Installed (with auxiliary lines)	10 570 mm	34'8"	10 570 mm	34'8"
3 Upperframe Width without Walkways	3020 mm	9'11"	3020 mm	9'11"
4 Tail Swing Radius	3760 mm	12'4"	3760 mm	12'4"
5 Counterweight Clearance	1340 mm	4'5"	1340 mm	4'5"
6 Ground Clearance	520 mm	1'8"	520 mm	1'8"
Bucket Type	SD		SD	
Bucket Capacity	3.20 m ³	4.20 yd ³	3.20 m ³	4.20 yd ³
Bucket Tip Radius	2060 mm	6'9"	2060 mm	6'9"

(continued on next page)

350 Hydraulic Excavator Specifications

Dimensions *(continued)*

All dimensions are approximate and may vary depending on bucket selection.

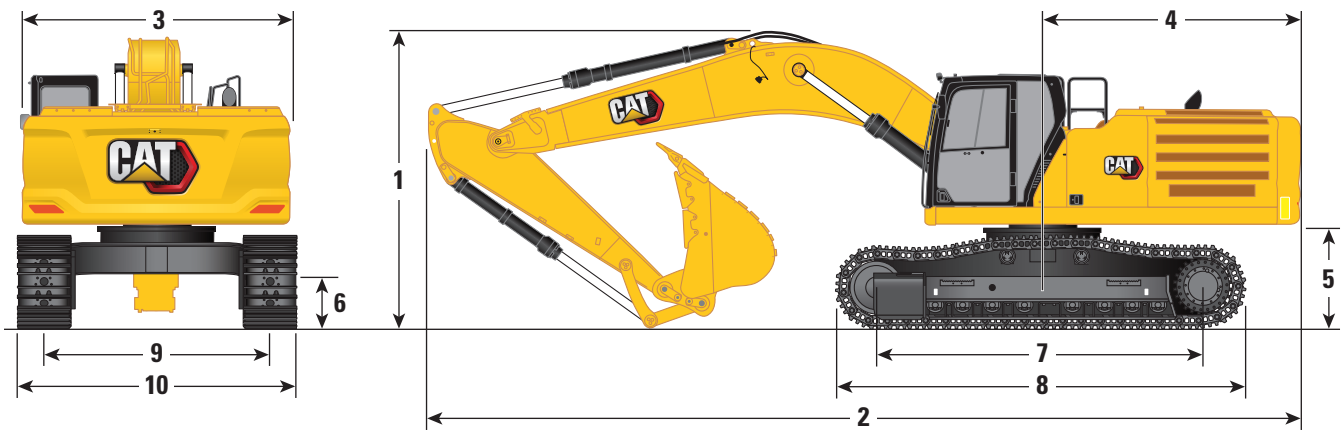

Boom Options

Mass Boom
6.55 m (21'6")

Stick Options


Mass Stick
M3.0UB (9'10") **M2.5UB (8'2")**

	M3.0UB (9'10")		M2.5UB (8'2")	
7 Track Length – Length to Center of Rollers (long undercarriage)	4360 mm	14'4"	4360 mm	14'4"
8 Track Length (long undercarriage)	5400 mm	17'9"	5400 mm	17'9"
9 Track Gauge – Extended	2740 mm	9'0"	2740 mm	9'0"
Track Width – Extended:				
600 mm (24") Shoes	3340 mm	10'11"	3340 mm	10'11"
750 mm (30") Shoes	3490 mm	11'5"	3490 mm	11'5"
900 mm (35") Shoes	3640 mm	11'11"	3640 mm	11'11"
10 Undercarriage Width (with steps) – Extended:				
600 mm (24") Shoes	3350 mm	11'0"	3350 mm	11'0"
750 mm (30") Shoes	3500 mm	11'6"	3500 mm	11'6"
900 mm (35") Shoes	3640 mm	11'11"	3640 mm	11'11"
Bucket Type	SD		SD	
Bucket Capacity	3.20 m ³	4.20 yd ³	3.20 m ³	4.20 yd ³
Bucket Tip Radius	2060 mm	6'9"	2060 mm	6'9"

350 Hydraulic Excavator Specifications

Working Ranges

All dimensions are approximate and may vary depending on bucket selection.

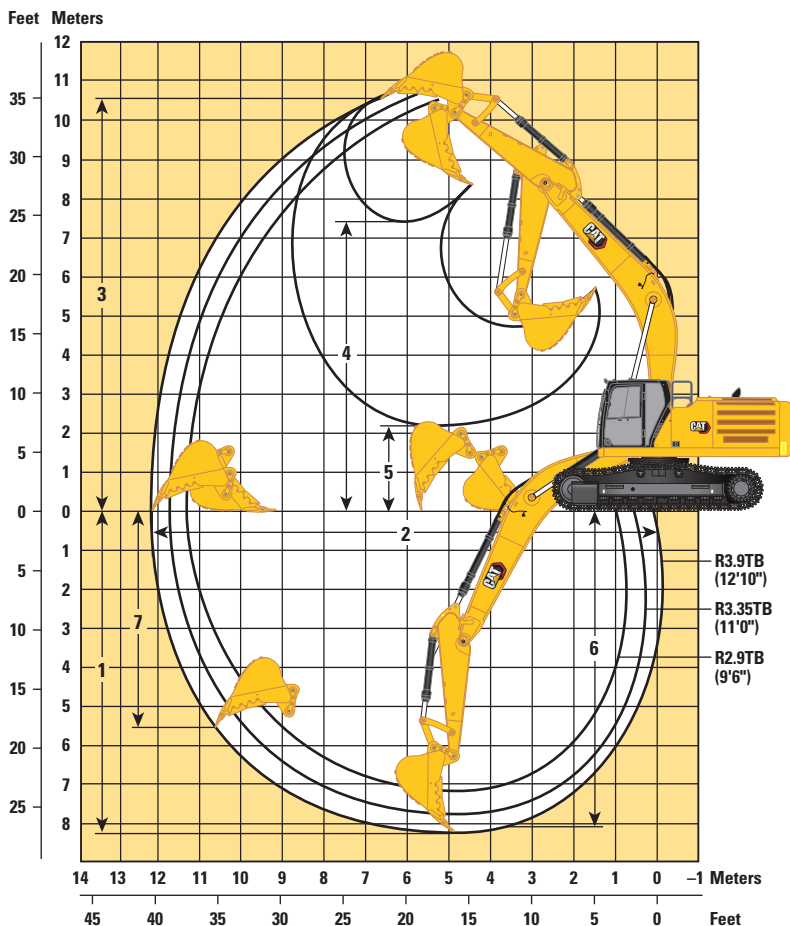

Boom Options

Reach Boom
6.9 m (22'8")

Stick Options

R3.9TB (12'10")

Reach Stick
R3.35TB (11'0")

R2.9TB (9'6")


	R3.9TB (12'10")		R3.35TB (11'0")		R2.9TB (9'6")	
1 Maximum Digging Depth	8240 mm	27'0"	7690 mm	25'3"	7240 mm	23'9"
2 Maximum Reach at Ground Line	12 180 mm	40'0"	11 760 mm	38'7"	11 340 mm	37'2"
3 Maximum Cutting Height	10 600 mm	34'9"	10 700 mm	35'1"	10 530 mm	34'7"
4 Maximum Loading Height	7360 mm	24'2"	7380 mm	24'3"	7200 mm	23'7"
5 Minimum Loading Height	2160 mm	7'1"	2710 mm	8'11"	3160 mm	10'4"
6 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	8110 mm	26'7"	7550 mm	24'9"	7080 mm	23'3"
7 Maximum Vertical Wall Digging Depth	5530 mm	18'2"	5630 mm	18'6"	5220 mm	17'2"
Bucket Digging Force (ISO)	266 kN	59,820 lbf	266 kN	59,820 lbf	266 kN	59,820 lbf
Stick Digging Force (ISO)	184 kN	41,330 lbf	200 kN	45,070 lbf	220 kN	49,530 lbf
Bucket Type	SD		SD		SD	
Bucket Capacity	2.41 m ³	3.15 yd ³	2.70 m ³	3.60 yd ³	2.70 m ³	3.60 yd ³
Bucket Tip Radius	1920 mm	6'4"	1920 mm	6'4"	1920 mm	6'4"

(continued on next page)

350 Hydraulic Excavator Specifications

Working Ranges (continued)

All dimensions are approximate and may vary depending on bucket selection.

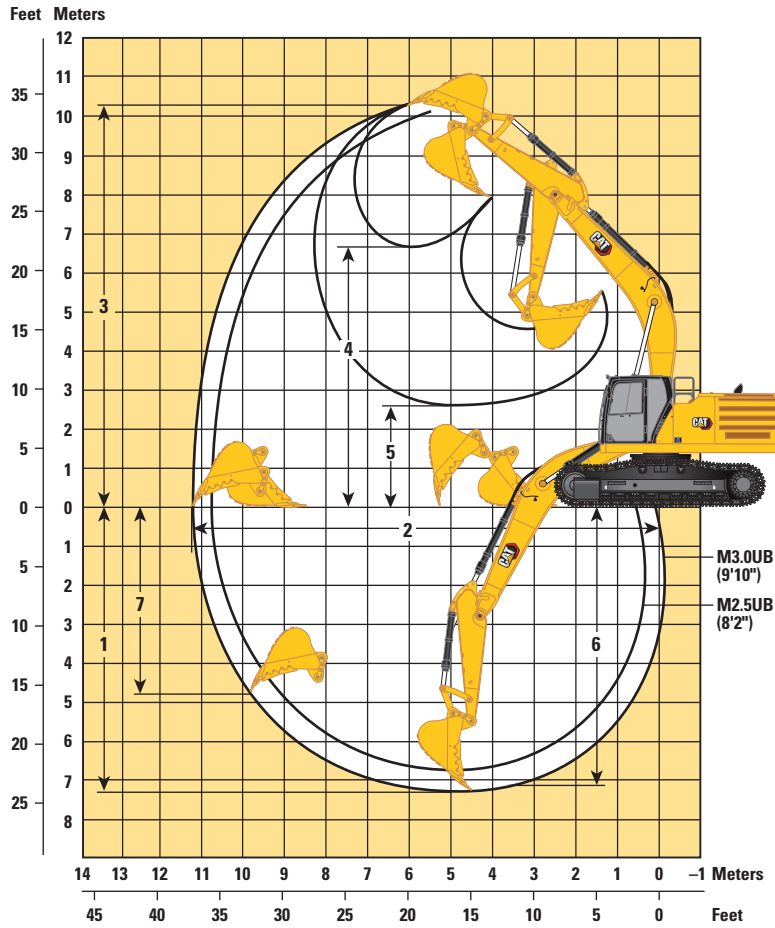

Boom Options

Mass Boom
6.55 m (21'6")

Stick Options



Mass Stick

	M3.0UB (9'10")		M2.5UB (8'2")	
	mm	ft/in	mm	ft/in
1 Maximum Digging Depth	7300	23'11"	6800	22'4"
2 Maximum Reach at Ground Line	11 270	37'0"	10 800	35'5"
3 Maximum Cutting Height	10 260	33'8"	10 070	33'0"
4 Maximum Loading Height	6730	22'1"	6530	21'5"
5 Minimum Loading Height	2570	8'5"	3070	10'1"
6 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	7160	23'6"	6640	21'9"
7 Maximum Vertical Wall Digging Depth	4800	15'9"	4360	14'4"
Bucket Digging Force (ISO)	291 kN	65,480 lbf	291 kN	65,480 lbf
Stick Digging Force (ISO)	211 kN	47,510 lbf	240 kN	53,850 lbf
Bucket Type	SD		SD	
Bucket Capacity	3.20 m ³	4.20 yd ³	3.20 m ³	4.20 yd ³
Bucket Tip Radius	2060 mm	6'9"	2060 mm	6'9"

350 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 9.0 mt (19,842 lb) – without Bucket, Heavy Lift: On

Long Undercarriage



		1500 mm/5'0"		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/in		
9000 mm 30'0"	kg lb													*7850 *17,450	*7850 *17,450	7880 25'4"
7500 mm 25'0"	kg lb													*7500 *16,550	*7500 *16,550	8980 29'2"
6000 mm 20'0"	kg lb								*10 750 *23,400	10 550 22,650	*10 100 *22,100	7800 16,700	*7450 *16,400	6800 15,050	*7300 *15,050	9730 31'9"
4500 mm 15'0"	kg lb							*13 700 *29,650	*13 700 *29,650	*11 750 *25,500	10 150 21,800	*10 600 *23,050	7600 16,300	*7600 *16,650	6150 13,600	10 190 33'4"
3000 mm 10'0"	kg lb					*21 900 *47,000	20 400 44,000	*15 950 *34,400	13 350 28,850	*12 950 *28,100	9650 20,750	*11 200 *24,350	7350 15,750	*7950 *17,450	5800 12,750	10 420 34'2"
1500 mm 5'0"	kg lb					*25 050 *54,000	18 900 40,750	*17 800 *38,450	12 600 27,150	*14 050 *30,400	9200 19,800	11 400 24,550	7050 15,200	*8500 *18,700	5650 12,450	10 430 34'2"
0 mm 0'0"	kg lb			*20,700 *20,700	*20,700 *20,700	*23 800 *55,100	18 250 39,250	*18 850 *40,750	12 050 26,000	14 650 31,550	8850 19,050	11 200 24,050	6850 14,750	9300 20,500	5750 12,600	10 210 33'5"
-1500 mm -5'0"	kg lb			*15 400 *34,650	*15 400 *34,650	*25 400 *55,100	18 050 38,800	*18 900 *41,000	11 800 25,400	14 450 31,050	8650 18,650	11 050 23,800	6750 14,550	9900 21,750	6050 13,350	9760 31'11"
-3000 mm -10'0"	kg lb	*38,750 *38,750	*38,750 *38,750	*22 450 *50,550	*22 450 *50,550	*23 600 *51,150	18 150 39,000	*18 000 *38,950	11 800 25,350	*14 150 *30,550	8650 18,600	*11 100 24,300	6800 14,900	*11 050 *24,300	6750 14,900	9030 29'6"
-4500 mm -15'0"	kg lb			*27 050 *58,400	*27 050 *58,400	*20 400 *44,000	18 450 39,700	*15 800 *33,950	11 950 25,750	*12 150 *25,800	8800 19,000	*11 050 *24,250	8150 18,150	*11 050 *24,250	8150 18,150	7960 25'10"
-6000 mm -20'0"	kg lb					*14 950 *31,550	*14 950 *31,550	*11 250 *23,250	*11 250 *23,250			*10 300 *22,500	*10 300 *22,500	*10 300 *22,500	6350 20'4"	



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

350 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 9.0 mt (19,842 lb) – without Bucket, Heavy Lift: On

Long Undercarriage



		1500 mm/5'0"		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/in		
9000 mm 30'0"	kg lb													*7850 *17,450	*7850 *17,450	7880 25'4"
7500 mm 25'0"	kg lb													*7500 *16,550	*7500 *16,550	8980 29'2"
6000 mm 20'0"	kg lb									*10 750 *23,400	10 550 22,750	*10 100 *22,100	7800 16,750	*7450 *16,400	6800 15,100	9730 31'9"
4500 mm 15'0"	kg lb							*13 700 *29,650	*13 700 *29,650	*11 750 *25,500	10 150 21,850	*10 600 *23,050	7600 16,350	*7600 *16,650	6150 13,650	10 190 33'4"
3000 mm 10'0"	kg lb					*21 900 *47,000	20 450 44,150	*15 950 *34,400	13 400 28,950	*12 950 *28,100	9700 20,850	*11 200 *24,350	7350 15,800	*7950 *17,450	5800 12,800	10 420 34'2"
1500 mm 5'0"	kg lb					*25 050 *54,000	19 000 40,900	*17 800 *38,450	12 650 27,200	*14 050 *30,400	9250 19,900	11 450 24,650	7100 15,250	*8500 *18,700	5700 12,500	10 430 34'2"
0 mm 0'0"	kg lb			*20,700 *20,700		*23 800 *55,100	18 300 39,400	*18 850 *40,750	12 100 26,050	14 700 31,650	8900 19,150	11 250 24,150	6900 14,800	9350 20,550	5750 12,650	10 210 33'5"
-1500 mm -5'0"	kg lb			*15 400 *34,650	*15 400 *34,650	*25 400 *55,100	18 100 38,950	*18 900 *41,000	11 850 25,500	14 500 31,200	8700 18,700	11 100 23,900	6800 14,600	9900 21,850	6100 13,400	9760 31'11"
-3000 mm -10'0"	kg lb	*38,750 *38,750		*22 450 *50,550	*22 450 *50,550	*23 600 *51,150	18 200 39,100	*18 000 *38,950	11 800 25,450	*14 150 *30,550	8650 18,650	*11 100 24,300	6800 15,000	*11 050 *24,300	6800 15,000	9030 29'6"
-4500 mm -15'0"	kg lb			*27 050 *58,400	*27 050 *58,400	*20 400 *44,000	18 500 39,850	*15 800 *33,950	12 000 25,850	*12 150 *25,800	8800 19,050			*11 050 *24,250	8200 18,250	7960 25'10"
-6000 mm -20'0"	kg lb					*14 950 *31,550	*14 950 *31,550	*11 250 *23,250	*11 250 *23,250					*10 300 *22,500	*10 300 *22,500	6350 20'4"



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

350 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 9.0 mt (19,842 lb) – without Bucket, Heavy Lift: On

Long Undercarriage



Reach	Unit	1500 mm/5'0"		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/in			
		kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	mm	ft/in
9000 mm 30'0"	kg														*7850	*7850	7880
	lb														*17,450	*17,450	25'4"
7500 mm 25'0"	kg														*7500	*7500	8980
	lb														*16,550	*16,550	29'2"
6000 mm 20'0"	kg									*10 750	10 700	*10 100	7900	*7450	*7450	6900	9730
	lb									*23,400	23,000	*22,100	16,950	*16,400	*16,400	15,300	31'9"
4500 mm 15'0"	kg							*13 700	*13 700	*11 750	10 250	*10 600	7700	*7600	*7600	6250	10 190
	lb							*29,650	*29,650	*25,500	22,100	*23,050	16,550	*16,650	*16,650	13,800	33'4"
3000 mm 10'0"	kg					*21 900	20 700	*15 950	13 550	*12 950	9800	*11 200	7450	*7950	*7950	5900	10 420
	lb					*47,000	44,650	*34,400	29,250	*28,100	21,100	*24,350	16,000	*17,450	*17,450	13,000	34'2"
1500 mm 5'0"	kg					*25 050	19 200	*17 800	12 800	*14 050	9350	11 600	7200	*8500	*8500	5750	10 430
	lb					*54,000	41,400	*38,450	27,550	*30,400	20,100	24,950	15,450	*18,700	*18,700	12,650	34'2"
0 mm 0'0"	kg					*23 800	18 550	*18 850	12 250	*14 750	9000	11 400	7000	*9450	*9450	5850	10 210
	lb					*52,700	40,900	*41,750	26,400	*32,500	19,400	24,500	15,000	*20,800	*20,800	12,850	33'5"
-1500 mm -5'0"	kg			*15 400	*15 400	*25 400	18 350	*18 900	12 000	14 700	8800	11 250	6850	10 050	10 050	6150	9760
	lb			*34,650	*34,650	*55,100	39,450	*41,000	25,850	31,600	18,950	24,250	14,800	22,150	22,150	13,600	31'11"
-3000 mm -10'0"	kg			*22 450	*22 450	*23 600	18 450	*18 000	11 950	*14 150	8750	*11 100	6900	*11 050	*11 050	6850	9030
	lb	*38,750	*38,750	*50,550	*50,550	*51,150	39,600	*38,950	25,800	*30,550	18,900			*24,300	*24,300	15,200	29'6"
-4500 mm -15'0"	kg			*27 050	*27 050	*20 400	18 750	*15 800	12 150	*12 150	8950			*11 050	*11 050	8300	7960
	lb			*58,400	*58,400	*44,000	40,300	*33,950	26,200	*25,800	19,300			*24,250	*24,250	18,450	25'10"
-6000 mm -20'0"	kg					*14 950	*14 950	*11 250	*11 250					*10 300	*10 300	6350	
	lb					*31,550	*31,550	*23,250	*23,250					*22,500	*22,500	20'4"	



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

350 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 9.0 mt (19,842 lb) – without Bucket, Heavy Lift: On

Long Undercarriage



Reach	Unit	3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	mm ft/in
9000 mm 30'0"	kg lb											*9000 *19,950	*9000 *19,950	7320 23'6"
7500 mm 25'0"	kg lb							*11 000 *24,100	10 650 22,800			*8450 *18,700	*8450 *18,700	8500 27'7"
6000 mm 20'0"	kg lb							*11 500 *25,050	10 400 22,350	*10 800 *20,400	7700 16,500	*18,300 *18,300	16,150 16,150	30'3"
4500 mm 15'0"	kg lb			*19 200 *41,200	*19 200 *41,200	*14 750 *31,850	14 050 30,300	*12 450 *27,050	10 000 21,600	*11 150 *24,300	7550 16,200	*8450 *18,550	6550 14,500	9770 31'11"
3000 mm 10'0"	kg lb			*23 600 *50,700	19 900 42,950	*16 850 *36,350	13 200 28,450	*13 550 *29,400	9600 20,650	11 650 25,100	7300 15,700	*8800 *19,300	6200 13,600	10 010 32'9"
1500 mm 5'0"	kg lb			*18 550 *44,350	*18 550 *40,350	*18 450 *39,900	12 500 26,950	*14 500 *31,450	9200 19,800	11 400 24,550	7100 15,250	*9400 *20,650	6050 13,300	10 020 32'10"
0 mm 0'0"	kg lb			*21 000 *48,750	18 350 39,400	*19 150 *41,500	12 100 26,050	14 700 31,600	8900 19,200	11 250 24,200	6900 14,900	9950 21,950	6150 13,550	9790 32'1"
-1500 mm -5'0"	kg lb	*15 000 *33,900	*15 000 *33,900	*24 900 *54,000	18 300 39,300	*18 900 *40,900	11 950 25,700	14 550 31,300	8750 18,900	11 200 24,100	6850 14,800	10 650 23,500	6550 14,450	9320 30'6"
-3000 mm -10'0"	kg lb	*23 950 *54,150	*23 950 *54,150	*22 600 *48,950	18 450 39,650	*17 550 *37,900	12 000 25,800	*13 800 *29,650	8800 18,950			*11 350 *25,000	7400 16,400	8560 27'11"
-4500 mm -15'0"	kg lb	*23 700 *51,100	*23 700 *51,100	*18 750 *40,400	*18 750 *40,400	*14 700 *31,450	12 250 26,400					*11 050 *24,200	9200 20,550	7410 24'0"



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

350 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 9.0 mt (19,842 lb) – without Bucket, Heavy Lift: On

Long Undercarriage



Reach	Unit	3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	
9000 mm 30'0"	kg lb											*9000 *19,950	*9000 *19,950	7320 23'6"
7500 mm 25'0"	kg lb							*11 000 *24,100	10 650 22,850			*8450 *18,700	*8450 *18,700	8500 27'7"
6000 mm 20'0"	kg lb							*11 500 *25,050	10 450 22,450	*10 800 *20,400	7700 16,550	*18,300 *18,300	16,200 16,200	30'3"
4500 mm 15'0"	kg lb			*19 200 *41,200	*19 200 *41,200	*14 750 *31,850	14 100 30,350	*12 450 *27,050	10 050 21,650	*11 150 *24,300	7550 16,250	*8450 *18,550	6600 14,550	9770 31'11"
3000 mm 10'0"	kg lb			*23 600 *50,700	19 950 43,100	*16 850 *36,350	13 250 28,550	*13 550 *29,400	9600 20,700	*11 700 25,150	7350 15,750	*8800 *19,300	6200 13,650	10 010 32'9"
1500 mm 5'0"	kg lb			*18 550 *44,350	*18 550 40,500	*18 450 *39,900	12 550 27,050	*14 500 *31,450	9200 19,850	11 450 24,650	7100 15,300	*9400 *20,650	6050 13,350	10 020 32'10"
0 mm 0'0"	kg lb			*21 000 *48,750	18 400 39,550	*19 150 *41,500	12 150 26,150	14 750 31,750	8950 19,250	11 300 24,300	6950 14,950	10 000 22,000	6200 13,600	9790 32'1"
-1500 mm -5'0"	kg lb	*15 000 *33,900	*15 000 *33,900	*24 900 *54,000	18 350 39,450	*18 900 *40,900	12 000 25,800	14 600 31,400	8800 18,950	11 200 24,150	6900 14,850	10 700 23,600	6600 14,500	9320 30'6"
-3000 mm -10'0"	kg lb	*23 950 *54,150	*23 950 *54,150	*22 600 *48,950	18 500 39,800	*17 550 *37,900	12 000 25,900	*13 800 *29,650	8850 19,050			*11 350 *25,000	7450 16,500	8560 27'11"
-4500 mm -15'0"	kg lb	*23 700 *51,100	*23 700 *51,100	*18 750 *40,400	*18 750 *40,400	*14 700 *31,450	12 250 26,450					*11 050 *24,200	9250 20,650	7410 24'0"



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

350 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 9.0 mt (19,842 lb) – without Bucket, Heavy Lift: On

Long Undercarriage



Reach	Unit	3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	
9000 mm 30'0"	kg lb											*9000 *19,950	*9000 *19,950	7320 23'6"
7500 mm 25'0"	kg lb							*11 000 *24,100	10 750 23,100			*8450 *18,700	*8450 *18,700	8500 27'7"
6000 mm 20'0"	kg lb							*11 500 *25,050	10 550 22,700	*10 800 *20,400	7800 16,750	*18,300 *16,400	*16,400 *16,400	30'3"
4500 mm 15'0"	kg lb			*19 200 *41,200	*19 200 *41,200	*14 750 *31,850	14 250 30,700	*12 450 *27,050	10 150 21,900	*11 150 *24,300	7650 16,450	*8450 *18,550	6650 14,750	9770 31'11"
3000 mm 10'0"	kg lb			*23 600 *50,700	20 200 43,600	*16 850 *36,350	13 400 28,900	*13 550 *29,400	9750 20,950	*11 700 *25,400	7400 15,950	*8800 *19,300	6300 13,850	10 010 32'9"
1500 mm 5'0"	kg lb			*18 550 *44,350	*18 550 40,950	*18 450 *39,900	12 700 27,400	*14 500 *31,450	9350 20,100	11 600 25,000	7200 15,500	*9400 *20,650	6150 13,550	10 020 32'10"
0 mm 0'0"	kg lb			*21 000 *48,750	18 600 40,050	*19 150 *41,500	12 300 26,500	14 950 32,150	9050 19,500	11 450 24,600	7050 15,150	10 150 22,300	6250 13,800	9790 32'1"
-1500 mm -5'0"	kg lb	*15 000 *33,900	*15 000 *33,900	*24 900 *54,000	18 600 39,900	*18 900 *40,900	12 150 26,100	14 800 31,800	8900 19,200	11 350 24,500	7000 15,050	10 850 23,900	6700 14,700	9320 30'6"
-3000 mm -10'0"	kg lb	*23 950 *54,150	*23 950 *54,150	*22 600 *48,950	18 750 40,300	*17 550 *37,900	12 150 26,200	*13 800 *29,650	8950 19,300			*11 350 *25,000	7550 16,700	8560 27'11"
-4500 mm -15'0"	kg lb	*23 700 *51,100	*23 700 *51,100	*18 750 *40,400	*18 750 *40,400	*14 700 *31,450	12 400 26,800					*11 050 *24,200	9350 20,900	7410 24'0"



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.



Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

350 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 9.0 mt (19,842 lb) – without Bucket, Heavy Lift: On

Long Undercarriage



Reach	Unit	3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	mm ft/in
9000 mm 30'0"	kg lb											*10 700 *23,850	*10 700 *23,850	6740 21'7"
7500 mm 25'0"	kg lb							*11 700 *25,700	10 450 22,400			*10 000 *22,150	9350 20,900	8010 25'11"
6000 mm 20'0"	kg lb					*13 600 *29,500	*13 600 *29,500	*12 050 *26,300	10 250 22,100			*9850 *21,650	7850 17,400	8840 28'10"
4500 mm 15'0"	kg lb			*20 650 *44,200	*20 650 *44,200	*15 500 *33,400	13 800 29,800	*12 950 *28,100	9900 21,350	*11 550 *25,200	7450 16,000	*10 000 *21,950	7000 15,450	9350 30'7"
3000 mm 10'0"	kg lb			*18 850 *49,150	*18 850 *41,850	*17 450 *37,650	13 000 28,050	*13 950 *30,250	9500 20,450	11 600 24,950	7250 15,600	*10 450 *22,900	6550 14,450	9600 31'5"
1500 mm 5'0"	kg lb			*13 650 *33,550	*13 650 *33,550	*18 800 *40,700	12 400 26,700	*14 750 *32,000	9100 19,650	11 400 24,500	7050 15,200	10 350 22,800	6450 14,150	9610 31'6"
0 mm 0'0"	kg lb			*19 550 *45,650	18 300 39,350	*19 200 *41,600	12 050 25,950	14 700 31,600	8900 19,150	11 250 24,250	6950 14,950	10 650 23,400	6550 14,450	9370 30'8"
-1500 mm -5'0"	kg lb	*15 200 *34,450	*15 200 *34,450	*24 050 *52,250	18 350 39,450	*18 600 *40,300	11 950 25,750	14 600 31,350	8800 18,950			11 450 25,300	7050 15,550	8870 29'0"
-3000 mm -10'0"	kg lb	*26 200 *57,200	*26 200 *57,200	*21 400 *46,400	18 600 40,000	*16 900 *36,500	12 050 26,000	*13 200 *28,250	8900 19,200			*11 750 *25,850	8100 17,950	8070 26'4"
-4500 mm -15'0"	kg lb			*17 050 *36,600	*17 050 *36,600	*13 400 *28,450	12 400 26,750					*11 100 *24,300	10 450 23,350	6840 22'2"



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

350 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 9.0 mt (19,842 lb) – without Bucket, Heavy Lift: On

Long Undercarriage



Reach (mm/ft/in)	Unit	3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm/ft/in		
		kg/lb	kg/lb	kg/lb	kg/lb	kg/lb	kg/lb	kg/lb	kg/lb	kg/lb	kg/lb	kg/lb	kg/lb	
9000 mm 30'0"	kg lb											*10 700 *23,850	*10 700 *23,850	6740 21'7"
7500 mm 25'0"	kg lb							*11 700 *25,700	10 500 22,500			*10 000 *22,150	9350 21,000	8010 25'11"
6000 mm 20'0"	kg lb					*13 600 *29,500	*13 600 *29,500	*12 050 *26,300	10 300 22,150			*9850 *21,650	7850 17,450	8840 28'10"
4500 mm 15'0"	kg lb			*20 650 *44,200	*20 650 *44,200	*15 500 *33,400	13 850 29,900	*12 950 *28,100	9950 21,400	*11 550 *25,200	7500 16,050	*10 000 *21,950	7000 15,500	9350 30'7"
3000 mm 10'0"	kg lb			*18 850 *49,150	*18 850 *41,950	*17 450 *37,650	13 050 28,150	*13 950 *30,250	9500 20,500	11 650 25,050	7300 15,650	*10 450 *22,900	6600 14,500	9600 31'5"
1500 mm 5'0"	kg lb			*13 650 *33,550	*13 650 *33,550	*18 800 *40,700	12 450 26,800	*14 750 *32,000	9150 19,750	11 450 24,600	7100 15,250	10 400 22,850	6450 14,200	9610 31'6"
0 mm 0'0"	kg lb			*19 550 *45,650	18 350 39,500	*19 200 *41,600	12 100 26,050	14 750 31,700	8900 19,200	11 300 24,300	6950 15,000	10 650 23,500	6600 14,500	9370 30'8"
-1500 mm -5'0"	kg lb	*15 200 *34,450	*15 200 *34,450	*24 050 *52,250	18 450 39,600	*18 600 *40,300	12 000 25,850	14 650 31,500	8850 19,050			11 500 25,400	7100 15,600	8870 29'0"
-3000 mm -10'0"	kg lb	*26 200 *57,200	*26 200 *57,200	*21 400 *46,400	18 650 40,100	*16 900 *36,500	12 100 26,050	*13 200 *28,250	8900 19,250			*11 750 *25,850	8150 18,050	8070 26'4"
-4500 mm -15'0"	kg lb			*17 050 *36,600	*17 050 *36,600	*13 400 *28,450	12 450 26,850					*11 100 *24,300	10 450 23,400	6840 22'2"



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

350 Hydraulic Excavator Specifications

Reach Boom Lift Capacities – Counterweight: 9.0 mt (19,842 lb) – without Bucket, Heavy Lift: On

Long Undercarriage



		3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/in		
9000 mm 30'0"	kg lb											*10 700 *23,850	*10 700 *23,850	6740 21'7"
7500 mm 25'0"	kg lb							*11 700 *25,700	10 600 22,750			*10 000 *22,150	9450 21,250	8010 25'11"
6000 mm 20'0"	kg lb					*13 600 *29,500	*13 600 *29,500	*12 050 *26,300	10 400 22,400			*9850 *21,650	7950 17,650	8840 28'10"
4500 mm 15'0"	kg lb			*20 650 *44,200	*20 650 *44,200	*15 500 *33,400	14 000 30,250	*12 950 *28,100	10 050 21,650	*11 550 *25,200	7550 16,250	*10 000 *21,950	7100 15,700	9350 30'7"
3000 mm 10'0"	kg lb			*18 850 *49,150	*18 850 *42,450	*17 450 *37,650	13 200 28,500	*13 950 *30,250	9650 20,750	11 800 25,350	7350 15,850	*10 450 *22,900	6700 14,700	9600 31'5"
1500 mm 5'0"	kg lb			*13 650 *33,550	*13 650 *33,550	*18 800 *40,700	12 600 27,100	*14 750 *32,000	9250 20,000	11 600 24,900	7200 15,450	10 550 23,150	6550 14,400	9610 31'6"
0 mm 0'0"	kg lb			*19 550 *45,650	18 600 39,950	*19 200 *41,600	12 250 26,400	14 900 32,100	9050 19,450	11 450 24,650	7050 15,200	10 800 23,800	6700 14,700	9370 30'8"
-1500 mm -5'0"	kg lb	*15 200 *34,450	*15 200 *34,450	*24 050 *52,250	18 650 40,100	*18 600 *40,300	12 150 26,150	*14 700 *31,750	8950 19,250			11 650 25,750	7200 15,850	8870 29'0"
-3000 mm -10'0"	kg lb	*26 200 *57,200	*26 200 *57,200	*21 400 *46,400	18 900 40,600	*16 900 *36,500	12 250 26,400	*13 200 *28,250	9050 19,500			*11 750 *25,850	8250 18,250	8070 26'4"
-4500 mm -15'0"	kg lb			*17 050 *36,600	*17 050 *36,600	*13 400 *28,450	12 600 27,200					*11 100 *24,300	10 600 23,700	6840 22'2"



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

350 Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Counterweight: 9.0 mt (19,842 lb) – without Bucket, Heavy Lift: On



Long Undercarriage



Boom Length	Unit	3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	mm ft/in	
7500 mm 25'0"	kg lb							*11 600 25,750	10 200 21,600			*9950 22,000	9750 21,900	7690 24'11"
6000 mm 20'0"	kg lb							*11 800 25,750	10 050 21,600			*9700 21,350	8000 17,800	8550 27'10"
4500 mm 15'0"	kg lb			*19 150 41,100	*19 150 41,100	*14 800 31,950	13 750 29,600	*12 550 27,300	9700 20,850	*10 850 7150		*9800 21,550	7050 15,600	9080 29'8"
3000 mm 10'0"	kg lb			*23 300 50,000	19 500 42,100	*16 700 36,050	12 850 27,700	*13 500 29,300	9250 19,900	11 350 24,350	6950 14,950	*10 250 22,500	6550 14,450	9330 30'7"
1500 mm 5'0"	kg lb			*22 800 54,850	18 250 39,350	*18 150 39,300	12 150 26,150	*14 300 31,000	8850 19,050	11 100 23,900	6750 14,550	10 500 23,150	6400 14,050	9340 30'7"
0 mm 0'0"	kg lb			*25 450 55,150	17 850 38,350	*18 700 40,550	11 700 25,200	14 400 30,950	8550 18,450	10 950 6650		10 800 23,800	6550 14,350	9100 29'10"
-1500 mm -5'0"	kg lb	*18 000 40,700	*18 000 40,700	*24 000 52,150	17 800 38,300	*18 200 39,450	11 550 24,850	*14 250 30,700	8450 18,200			11 750 25,900	7050 15,550	8590 28'1"
-3000 mm -10'0"	kg lb	*27 350 59,450	*27 350 59,450	*21 300 46,050	18 050 38,800	*16 450 35,450	11 650 25,100	*12 500 26,550	8550 18,500			*11 800 25,950	8200 18,200	7750 25'3"
-4500 mm -15'0"	kg lb			*16 500 35,300	*16 500 35,300	*12 450 26,150	12 050 26,050					*11 050 24,150	10 950 24,150	6460 20'10"

Mass Boom Lift Capacities – Counterweight: 9.0 mt (19,842 lb) – without Bucket, Heavy Lift: On

Long Undercarriage



Boom Length	Unit	3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/in		
		kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	kg lb	mm ft/in	
7500 mm 25'0"	kg lb							*11 600 25,750	10 250 21,650			*9950 22,000	9800 22,000	7690 24'11"
6000 mm 20'0"	kg lb							*11 800 25,750	10 100 21,650			*9700 21,350	8050 17,850	8550 27'10"
4500 mm 15'0"	kg lb			*19 150 41,100	*19 150 41,100	*14 800 31,950	13 750 29,700	*12 550 27,300	9700 20,900	*10 850 7200		*9800 21,550	7100 15,650	9080 29'8"
3000 mm 10'0"	kg lb			*23 300 50,000	19 550 42,250	*16 700 36,050	12 900 27,800	*13 500 29,300	9300 19,950	11 400 24,450	7000 15,000	*10 250 22,500	6600 14,500	9330 30'7"
1500 mm 5'0"	kg lb			*22 800 54,850	18 350 39,500	*18 150 39,300	12 200 26,250	*14 300 31,000	8850 19,100	11 150 24,000	6800 14,600	10 550 23,250	6400 14,100	9340 30'7"
0 mm 0'0"	kg lb			*25 450 55,150	17 900 38,500	*18 700 40,550	11 750 25,300	14 450 31,050	8600 18,500	11 000 6650		10 850 23,900	6550 14,450	9100 29'10"
-1500 mm -5'0"	kg lb	*18 000 40,700	*18 000 40,700	*24 000 52,150	17 900 38,400	*18 200 39,450	11 600 24,950	*14 250 30,750	8500 18,250			11 800 26,000	7100 15,600	8590 28'1"
-3000 mm -10'0"	kg lb	*27 350 59,450	*27 350 59,450	*21 300 46,050	18 100 38,900	*16 450 35,450	11 700 25,200	*12 500 26,550	8600 18,550			*11 800 25,950	8250 18,300	7750 25'3"
-4500 mm -15'0"	kg lb			*16 500 35,300	*16 500 35,300	*12 450 26,150	12 100 26,150					*11 050 24,150	11 000 24,150	6460 20'10"



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

350 Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Counterweight: 9.0 mt (19,842 lb) – without Bucket, Heavy Lift: On




Long Undercarriage



Reach mm ft/in	Weight kg lb	3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		9000 mm/30'0"		mm ft/in		
7500 mm 25'0"	kg lb							*11 600 25,750	10 350 21,900			*9950 *22,000	9900 *22,000	7690 24'11"
6000 mm 20'0"	kg lb							*11 800 *25,750	10 200 21,900			*9700 *21,350	8100 18,050	8550 27'10"
4500 mm 15'0"	kg lb			*19 150 *41,100	*19 150 *41,100	*14 800 *31,950	13 900 30,000	*12 550 *27,300	9850 21,150	*10 850 7300		*9800 *21,550	7150 15,850	9080 29'8"
3000 mm 10'0"	kg lb			*23 300 *50,000	19 800 42,700	*16 700 *36,050	13 050 28,150	*13 500 *29,300	9400 20,200	11 550 24,800	7100 15,200	*10 250 *22,500	6650 14,700	9330 30'7"
1500 mm 5'0"	kg lb			*22 800 *54,850	18 550 40,000	*18 150 *39,300	12 350 26,550	*14 300 *31,000	9000 19,350	11 300 24,300	6900 14,800	10 700 23,550	6500 14,300	9340 30'7"
0 mm 0'0"	kg lb			*25 450 *55,150	18 150 39,000	*18 700 *40,550	11 900 25,650	14 650 31,450	8700 18,750	11 150 6750		11 000 24,200	6650 14,650	9100 29'10"
-1500 mm -5'0"	kg lb	*18 000 *40,700	*18 000 *40,700	*24 000 *52,150	18 100 38,900	*18 200 *39,450	11 750 25,300	*14 250 *30,750	8600 18,500			*11 850 *26,100	7200 15,850	8590 28'1"
-3000 mm -10'0"	kg lb	*27 350 *59,450	*27 350 *59,450	*21 300 *46,050	18 350 39,400	*16 450 *35,450	11 850 25,500	*12 500 *26,550	8700 18,800			*11 800 *25,950	8350 18,550	7750 25'3"
-4500 mm -15'0"	kg lb			*16 500 *35,300	*16 500 *35,300	*12 450 *26,150	12 250 *26,150					*11 050 *24,150	*11 050 *24,150	6460 20'10"

Mass Boom Lift Capacities – Counterweight: 9.0 mt (19,842 lb) – without Bucket, Heavy Lift: On

Long Undercarriage



Reach mm ft/in	Weight kg lb	3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		mm ft/in		
7500 mm 25'0"	kg lb									*12 750 *28,200	11 000 24,800	7120 23'0"
6000 mm 20'0"	kg lb					*14 050 *30,450	*14 050 *30,450	*12 600 *27,500	10 000 21,400	*12 350 *27,200	8850 19,650	8050 26'2"
4500 mm 15'0"	kg lb			*20 800 *44,600	*20 800 *44,600	*15 700 *33,900	13 600 29,300	*13 200 *28,750	9650 20,750	*12 250 *26,950	7700 17,100	8610 28'1"
3000 mm 10'0"	kg lb			*53,200	41,200	*17 500 *37,750	12 750 27,550	*14 050 *30,500	9250 19,900	11 600 25,650	7150 15,800	8880 29'1"
1500 mm 5'0"	kg lb					*18 700 *40,400	12 150 26,150	*14 700 31,700	8900 19,150	11 450 25,150	7000 15,350	8890 29'1"
0 mm 0'0"	kg lb			*24 150 *54,500	18 050 38,750	*18 900 *40,900	11 800 25,450	14 500 31,200	8700 18,700	11 800 26,000	7150 15,800	8630 28'3"
-1500 mm -5'0"	kg lb	*18 250 *41,650	*18 250 *41,650	*23 150 *50,400	18 100 38,900	*18 000 *38,950	11 750 25,300	*14 050 *30,200	8650 18,600	*12 550 *27,700	7850 17,300	8090 26'5"
-3000 mm -10'0"	kg lb	*23 950 *52,150	*23 950 *52,150	*19 950 *43,200	18 400 39,600	*15 700 *33,700	11 900 25,700			*12 300 *27,050	9350 20,750	7190 23'5"
-4500 mm -15'0"	kg lb			*14 300 *30,300	*14 300 *30,300					*10 900 *23,650	*10 900 *23,650	5770 18'7"



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.




Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

350 Hydraulic Excavator Specifications

Mass Boom Lift Capacities – Counterweight: 9.0 mt (19,842 lb) – without Bucket, Heavy Lift: On




Long Undercarriage



Reach mm ft/in	Weight kg lb	3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		mm ft/in		
7500 mm 25'0"	kg lb									*12 750 *28,200	11 050 24,900	7120 23'0"
6000 mm 20'0"	kg lb					*14 050 *30,450	*14 050 *30,450	*12 600 *27,500	10 000 21,500	*12 350 *27,200	8850 19,750	8050 26'2"
4500 mm 15'0"	kg lb			*20 800 *44,600	*20 800 *44,600	*15 700 *33,900	13 650 29,400	*13 200 *28,750	9700 20,850	*12 250 *26,950	7750 17,150	8610 28'1"
3000 mm 10'0"	kg lb			*53,200	41,350	*17 500 *37,750	12 800 27,650	*14 050 *30,500	9300 20,000	11 650 25,750	7200 15,850	8880 29'1"
1500 mm 5'0"	kg lb					*18 700 *40,400	12 200 26,250	*14 700 31,850	8950 19,250	11 450 25,250	7000 15,450	8890 29'1"
0 mm 0'0"	kg lb			*24 150 *54,500	18 100 38,900	*18 900 *40,900	11 850 25,550	14 550 31,300	8700 18,750	11 850 26,100	7200 15,850	8630 28'3"
-1500 mm -5'0"	kg lb	*18 250 *41,650	*18 250 *41,650	*23 150 *50,400	18 200 39,050	*18 000 *38,950	11 800 25,400	*14 050 *30,200	8650 18,700	*12 550 *27,700	7850 17,350	8090 26'5"
-3000 mm -10'0"	kg lb	*23 950 *52,150	*23 950 *52,150	*19 950 *43,200	18 500 39,750	*15 700 *33,700	11 950 25,800			*12 300 *27,050	9400 20,850	7190 23'5"
-4500 mm -15'0"	kg lb			*14 300 *30,300	*14 300 *30,300					*10 900 *23,650	*10 900 *23,650	5770 18'7"

Mass Boom Lift Capacities – Counterweight: 9.0 mt (19,842 lb) – without Bucket, Heavy Lift: On

Long Undercarriage



Reach mm ft/in	Weight kg lb	3000 mm/10'0"		4500 mm/15'0"		6000 mm/20'0"		7500 mm/25'0"		mm ft/in		
7500 mm 25'0"	kg lb									*12 750 *28,200	11 150 25,150	7120 23'0"
6000 mm 20'0"	kg lb					*14 050 *30,450	*14 050 *30,450	*12 600 *27,500	10 150 21,750	*12 350 *27,200	8950 19,950	8050 26'2"
4500 mm 15'0"	kg lb			*20 800 *44,600	*20 800 *44,600	*15 700 *33,900	13 800 29,700	*13 200 *28,750	9800 21,100	*12 250 *26,950	7850 17,350	8610 28'1"
3000 mm 10'0"	kg lb			*53,200	41,850	*17 500 *37,750	12 950 27,950	*14 050 *30,500	9400 20,250	11 800 26,050	7300 16,050	8880 29'1"
1500 mm 5'0"	kg lb					*18 700 *40,400	12 350 26,600	*14 700 *31,850	9050 19,500	11 600 25,600	7100 15,650	8890 29'1"
0 mm 0'0"	kg lb			*24 150 *54,500	18 350 39,400	*18 900 *40,900	12 000 25,850	14 750 31,700	8800 19,000	12 000 26,450	7300 16,050	8630 28'3"
-1500 mm -5'0"	kg lb	*18 250 *41,650	*18 250 *41,650	*23 150 *50,400	18 400 39,550	*18 000 *38,950	11 950 25,700	*14 050 *30,200	8800 18,950	*12 550 *27,700	7950 17,600	8090 26'5"
-3000 mm -10'0"	kg lb	*23 950 *52,150	*23 950 *52,150	*19 950 *43,200	18 700 40,200	*15 700 *33,700	12 100 26,100			*12 300 *27,050	9500 21,100	7190 23'5"
-4500 mm -15'0"	kg lb			*14 300 *30,300	*14 300 *30,300					*10 900 *23,650	*10 900 *23,650	5770 18'7"



ISO 10567



* Indicates that the load is limited by hydraulic lifting capacity rather than tipping load. The above loads are in compliance with hydraulic excavator lift capacity standard ISO 10567:2007. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Weight of all lifting accessories must be deducted from the above lifting capacities. Lifting capacities are based on the machine standing on a firm, uniform supporting surface. The use of a work tool attachment point to handle/lift objects, could affect the machine lift performance.

Lift capacity stays with ±5% for all available track shoes.

Always refer to the appropriate Operation and Maintenance Manual for specific product information.

350 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – Africa, Middle East and Commonwealth of Independent States

	Linkage	Width		Capacity		Weight		Fill	350				
									Long Fixed Gauge Undercarriage				
		9.0 mt (19,842 lb) Counterweight					6.9 m (22'8") Reach			6.55 m (21'6") Mass			
		mm	in	m ³	yd ³	kg	lb	%	R2.9 (9'6")	R3.35 (11'0")	R3.9 (12'10")	M2.5 (8'2")	M3.0 (9'10")
Pin-On (No Quick Coupler)													
Heavy Duty	TB	1650	65	2.41	3.15	2221	4,896	100	⊙	⊙	⊖		
	TB	1900	74	2.78	3.64	2429	5,355	100	⊖	○	○		
Severe Duty	TB	1550	61	2.14	2.80	2329	5,134	90	●	●	⊙		
Heavy Duty	UB	1950	77	3.43	4.49	2911	6,417	100				○	◇
Severe Duty	UB	1650	65	2.77	3.62	2737	6,033	90				⊙	⊖
	UB	1850	73	3.21	4.20	2951	6,505	90				⊖	○
Maximum load with pin-on (payload + bucket)								kg	6858	6386	5860	7476	6717
								lb	15,119	14,079	12,919	16,482	14,808
With Cat Pin Grabber Coupler													
Heavy Duty	TB	1650	65	2.41	3.15	2221	4,896	100	⊖	○	◇		
	TB	1900	74	2.78	3.64	2429	5,355	100	○	◇	X		
Severe Duty	TB	1550	61	2.14	2.80	2329	5,134	90	⊙	⊖	○		
Maximum load with coupler (payload + bucket)								kg	5805	5333	4807	6423	5664
								lb	12,797	11,757	10,597	14,160	12,487
With CW Quick Coupler													
Heavy Duty	TB	1650	65	2.41	3.15	2221	4,896	100	⊖	○	○		
	TB	1900	74	2.78	3.64	2429	5,355	100	○	○	◇		
Severe Duty	TB	1550	61	2.14	2.80	2329	5,134	90	⊙	⊙	⊖		
Heavy Duty	UB	1950	77	3.43	4.49	2911	6,417	100				◇	◇
Severe Duty	UB	1650	65	2.77	3.62	2737	6,033	90				⊖	○
	UB	1850	73	3.21	4.20	2951	6,505	90				○	◇
Maximum load with coupler (payload + bucket)								kg	6103	5631	5105	6657	5898
								lb	13,455	12,414	11,255	14,676	13,003

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with Long tips.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

350 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – Australia and New Zealand

	Linkage	Width		Capacity		Weight		Fill	350						
		Long Fixed Gauge Undercarriage								9.0 mt (19,842 lb) Counterweight					
		6.9 m (22'8") Reach			6.55 m (21'6") Mass										
		R2.9 (9'6")	R3.35 (11'0")	R3.9 (12'10")	M2.5 (8'2")	M3.0 (9'10")									
	mm	in	m ³	yd ³	kg	lb	%								
Pin-On (No Quick Coupler)															
Heavy Duty	TB	1650	66	2.41	3.16	2274	5,013	100	⊙	⊖	⊖				
	TB	1850	72	2.69	3.52	2403	5,298	100	⊖	⊖	○				
Severe Duty	TB	1650	66	2.41	3.15	2367	5,218	90	●	⊙	⊖				
Heavy Duty	UB	1950	77	3.43	4.48	2912	6,419	100				○	◇		
Maximum load with pin-on (payload + bucket)								kg	6892	6394	5808	7508	6786		
								lb	15,194	14,096	12,804	16,552	14,961		
With Cat Pin Grabber Coupler															
Heavy Duty	TB	1650	66	2.41	3.16	2274	5,013	100	⊖	○	◇				
	TB	1850	72	2.69	3.52	2403	5,298	100	○	◇	◇				
Severe Duty	TB	1650	66	2.41	3.15	2367	5,218	90	⊖	○	◇				
Maximum load with coupler (payload + bucket)								kg	5839	5341	4755	6455	5733		
								lb	12,872	11,774	10,483	14,230	12,639		
With CW Quick Coupler															
Heavy Duty	TB	1650	66	2.41	3.16	2274	5,013	100	⊖	○	○				
	TB	1850	72	2.69	3.52	2403	5,298	100	○	○	◇				
Severe Duty	TB	1650	66	2.41	3.15	2367	5,218	90	⊙	⊖	○				
Heavy Duty	UB	1950	77	3.43	4.48	2912	6,419	100				◇	◇		
Maximum load with coupler (payload + bucket)								kg	6137	5639	5053	6689	5967		
								lb	13,530	12,432	11,140	14,747	13,155		

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with Long tips.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

350 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – South America

	Linkage	Width		Capacity		Weight		Fill	350		
		mm	in	m ³	yd ³	kg	lb		%	Long Fixed Gauge Undercarriage	
										9.0 mt (19,842 lb) Counterweight	
										6.55 m (21'6") Mass	
								M2.5 (8'2")	M3.0 (9'10")		
Pin-On (No Quick Coupler)											
Severe Duty	UB	1600	63	2.61	3.41	3105	6,844	90	⊙	⊖	
	UB	1650	65	2.77	3.62	2737	6,033	90	⊙	⊖	
	UB	1850	73	3.21	4.20	2951	6,505	90	⊖	⊖	
Maximum load with pin-on (payload + bucket)								kg	7476	6717	
								lb	16,482	14,808	
With CW Quick Coupler											
Severe Duty	UB	1600	63	2.61	3.41	3105	6,844	90	⊖	⊖	
	UB	1650	65	2.77	3.62	2737	6,033	90	⊖	⊖	
	UB	1850	73	3.21	4.20	2951	6,505	90	⊖	◇	
Maximum load with coupler (payload + bucket)								kg	6657	5898	
								lb	14,676	13,003	

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with Long tips.

Maximum Material Density:

- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

350 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility – Southeast Asia

	Linkage	Width		Capacity		Weight		Fill	350					
		Long Fixed Gauge Undercarriage								9.0 mt (19,842 lb) Counterweight				
		6.9 m (22'8") Reach		6.55 m (21'6") Mass										
		R2.9 (9'6")	R3.35 (11'0")	M2.5 (8'2")	M3.0 (9'10")									
	mm	in	m ³	yd ³	kg	lb	%							
Pin-On (No Quick Coupler)														
Heavy Duty	TB	1850	73	2.69	3.52	2428	5,352	100	⊖	⊖				
Severe Duty	TB	1650	66	2.41	3.16	2436	5,370	90	●	⊙				
General Duty	UB	2000	79	3.60	4.71	2890	6,371	100			○	◇		
Heavy Duty	UB	1900	75	3.43	4.49	2889	6,368	100			○	◇		
Severe Duty	UB	1650	65	2.77	3.62	2675	5,898	90			⊙	⊖		
	UB	1850	73	3.21	4.20	2929	6,456	90			⊖	○		
Maximum load with pin-on (payload + bucket)								kg	6858	6386	7476	6717		
								lb	15,119	14,079	16,482	14,808		
With Cat Pin Grabber Coupler														
Heavy Duty	TB	1850	73	2.69	3.52	2428	5,352	100	○	◇				
Severe Duty	TB	1650	66	2.41	3.16	2436	5,370	90	⊖	○				
Maximum load with coupler (payload + bucket)								kg	5805	5333	6423	5664		
								lb	12,797	11,757	14,160	12,487		
With CW Quick Coupler														
Heavy Duty	TB	1850	73	2.69	3.52	2428	5,352	100	○	○				
Severe Duty	TB	1650	66	2.41	3.16	2436	5,370	90	⊖	⊖				
General Duty	UB	2000	79	3.60	4.71	2890	6,371	100			◇	X		
Heavy Duty	UB	1900	75	3.43	4.49	2889	6,368	100			◇	◇		
Severe Duty	UB	1650	65	2.77	3.62	2675	5,898	90			⊖	○		
	UB	1850	73	3.21	4.20	2929	6,456	90			○	◇		
Maximum load with coupler (payload + bucket)								kg	6103	5631	6657	5898		
								lb	13,455	12,414	14,676	13,003		

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with Long tips.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)
- X Not Recommended

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

350 Hydraulic Excavator Specifications

Attachments Offering Guide – Africa, Middle East

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

PIN-ON ATTACHMENTS

Undercarriage		Long		
		9.0 mt (19,842 lb)		
Counterweight				
Boom Type		Reach	Mass	
Stick Length		3.35 m (11'0")	2.5 m (8'2")	3.0 m (9'10")
Hydraulic Hammers	H160 S	✓	✓	✓
	H180 GC	✓	✓	✓
	H180 GC S	✓	✓	✓
	H180 S	✓	✓	✓
	H190 S	✓	✓	✓
Multi-Processors	MP332 Concrete Cutter Jaw	✓		
	MP332 Demolition Jaw	✓		
	MP332 Pulverizer Jaw	✓		
	MP332 Shear Jaw	✓		
	MP332 Tank Shear Jaw	✓		
	MP332 Universal Jaw	✓		
	MP332 Concrete Cutter Jaw-Flat Top	✓		
	MP332 Demolition Jaw-Flat Top	✓		
	MP332 Pulverizer Jaw-Flat Top	✓		
	MP332 Shear Jaw-Flat Top	✓		
	MP332 Tank Shear Jaw-Flat Top	✓		
	MP332 Universal Jaw-Flat Top	✓		
	MP345 Concrete Cutter Jaw	✓	✓	✓
	MP345 Demolition Jaw	✓	✓	✓
	MP345 Pulverizer Jaw	✓	✓	✓
	MP345 Shear Jaw	✓	✓	✓
	MP345 Concrete Cutter Jaw-Flat Top	✓	✓	✓
	MP345 Demolition Jaw-Flat Top	✓	✓	✓
	MP345 Pulverizer Jaw-Flat Top	✓*	✓	✓
	MP345 Shear Jaw-Flat Top	✓	✓	✓

(continued on next page)

350 Hydraulic Excavator Specifications

Attachments Offering Guide – Africa, Middle East (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match
 * Working range front only
 No Match
 1800 kg/m³ (3,000 lb/yd³)
 1200 kg/m³ (2,000 lb/yd³)

PIN-ON ATTACHMENTS (continued)

Undercarriage		Long		
Counterweight		9.0 mt (19,842 lb)		
Boom Type		Reach	Mass	
Stick Length		3.35 m (11'0")	2.5 m (8'2")	3.0 m (9'10")
Demolition and Sorting Grapples	G345	✓	✓	✓
Mobile Scrap and Demolition Shears	S3050 Flat Top	✓*	✓	✓
Pulverizers	P232 Secondary Pulverizer	✓		
	P332 Primary Pulverizer	✓		
	P332 Primary Pulverizer-Flat Top	✓		
Orange Peel Grapples	GSH455-1000	●		
	GSH455-1500	●		
	GSH455-2000	○		
	GSH555-1000	●		
	GSH555-1500	●		
	GSM-50-1000	●		
	GSM-50-1250	●		
	GSM-50-1500	○		
	GSM-50-2000	○		
	GSM-60-1250	○	●	○
	GSM-60-1500		○	○
	GSM-60-2000		○	
Clamshell Grapples	CTV30-1700	●		
	CTV30-1900	○		
	CTV30-2300	○		

(continued on next page)

350 Hydraulic Excavator Specifications

Attachments Offering Guide – Africa, Middle East (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

CAT PIN GRABBER COUPLER ATTACHMENTS

Undercarriage		Long		
Counterweight		9.0 mt (19,842 lb)		
Boom Type		Reach	Mass	
Stick Length		3.35 m (11'0")	2.5 m (8'2")	3.0 m (9'10")
Hydraulic Hammers	H160 S	✓	✓	✓
	H180 GC	✓*	✓	✓*
	H180 GC S	✓	✓	✓
	H180 S	✓	✓	✓
Multi-Processors	MP332 Concrete Cutter Jaw	✓		
	MP332 Demolition Jaw	✓		
	MP332 Pulverizer Jaw	✓		
	MP332 Shear Jaw	✓		
	MP332 Tank Shear Jaw	✓		
	MP332 Universal Jaw	✓		
	MP332 Concrete Cutter Jaw-Flat Top	✓		
	MP332 Demolition Jaw-Flat Top	✓		
	MP332 Pulverizer Jaw-Flat Top	✓		
	MP332 Shear Jaw-Flat Top	✓		
	MP332 Tank Shear Jaw-Flat Top	✓*		
	MP332 Universal Jaw-Flat Top	✓		
	MP345 Concrete Cutter Jaw		✓	
	MP345 Demolition Jaw		✓*	
	MP345 Pulverizer Jaw		✓*	
MP345 Shear Jaw		✓		
MP345 Shear Jaw-Flat Top		✓*		
Demolition and Sorting Grapples	G345	✓	✓	✓
Pulverizers	P232 Secondary Pulverizer	✓		
	P332 Primary Pulverizer	✓		
	P332 Primary Pulverizer-Flat Top	✓		

(continued on next page)

350 Hydraulic Excavator Specifications

Attachments Offering Guide – Africa, Middle East (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

CW-55 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Long		
Counterweight		9.0 mt (19,842 lb)		
Boom Type		Reach	Mass	
Stick Length		3.35 m (11'0")	2.5 m (8'2")	3.0 m (9'10")
Hydraulic Hammers	H160 S	✓	✓	✓
	H180 GC	✓*	✓	✓
	H180 GC S	✓	✓	✓
	H180 S	✓	✓	✓
	H190 S		✓*	
Multi-Processors	MP332 Concrete Cutter Jaw	✓		
	MP332 Demolition Jaw	✓		
	MP332 Pulverizer Jaw	✓		
	MP332 Shear Jaw	✓		
	MP332 Tank Shear Jaw	✓		
	MP332 Universal Jaw	✓		
	MP332 Concrete Cutter Jaw-Flat Top	✓		
	MP332 Demolition Jaw-Flat Top	✓		
	MP332 Pulverizer Jaw-Flat Top	✓		
	MP332 Shear Jaw-Flat Top	✓		
	MP332 Tank Shear Jaw-Flat Top	✓*		
	MP332 Universal Jaw-Flat Top	✓		
	MP345 Concrete Cutter Jaw	✓*	✓	✓*
	MP345 Demolition Jaw		✓	✓*
	MP345 Pulverizer Jaw		✓	✓*
	MP345 Shear Jaw	✓*	✓	✓*
	MP345 Concrete Cutter Jaw-Flat Top		✓	
	MP345 Demolition Jaw-Flat Top		✓*	
MP345 Pulverizer Jaw-Flat Top		✓*		
MP345 Shear Jaw-Flat Top		✓		
Demolition and Sorting Grapples	G345	✓	✓	✓
Mobile Scrap and Demolition Shears	S3050 Flat Top		✓*	
Pulverizers	P232 Secondary Pulverizer	✓		
	P332 Primary Pulverizer	✓		
	P332 Primary Pulverizer-Flat Top	✓		

BOOM-MOUNT ATTACHMENTS

Undercarriage		Long		
Counterweight		9.0 mt (19,842 lb)		
Boom Type		Reach	Mass	
Mobile Scrap and Demolition Shears	S2090	✓		✓
	S3070 Flat Top	✓		
	S3090 Flat Top	✓*		

350 Hydraulic Excavator Specifications

Attachments Offering Guide – Commonwealth of Independent States

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

PIN-ON ATTACHMENTS

Undercarriage		Long				
Counterweight		9.0 mt (19,842 lb)				
Boom Type		Reach			Mass	
Stick Length		3.9 m (12'10")	2.9 m (9'6")	3.35 m (11'0")	2.5 m (8'2")	3.0 m (9'10")
Hydraulic Hammers	H160 S	✓	✓	✓	✓	✓
	H180 GC	✓	✓	✓	✓	✓
	H180 GC S	✓	✓	✓	✓	✓
	H180 S	✓	✓	✓	✓	✓
	H190 S	✓*	✓	✓	✓	✓
Multi-Processors	MP332 Concrete Cutter Jaw	✓	✓	✓		
	MP332 Demolition Jaw	✓	✓	✓		
	MP332 Pulverizer Jaw	✓	✓	✓		
	MP332 Shear Jaw	✓	✓	✓		
	MP332 Tank Shear Jaw	✓	✓	✓		
	MP332 Universal Jaw	✓	✓	✓		
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓	✓		
	MP332 Demolition Jaw-Flat Top	✓	✓	✓		
	MP332 Pulverizer Jaw-Flat Top	✓	✓	✓		
	MP332 Shear Jaw-Flat Top	✓	✓	✓		
	MP332 Tank Shear Jaw-Flat Top	✓	✓	✓		
	MP332 Universal Jaw-Flat Top	✓	✓	✓		
	MP345 Concrete Cutter Jaw	✓	✓	✓	✓	✓
	MP345 Demolition Jaw	✓	✓	✓	✓	✓
	MP345 Pulverizer Jaw	✓	✓	✓	✓	✓
	MP345 Shear Jaw	✓	✓	✓	✓	✓
	MP345 Concrete Cutter Jaw-Flat Top	✓	✓	✓	✓	✓
	MP345 Demolition Jaw-Flat Top	✓*	✓	✓	✓	✓
	MP345 Pulverizer Jaw-Flat Top	✓*	✓	✓*	✓	✓
	MP345 Shear Jaw-Flat Top	✓	✓	✓	✓	✓

(continued on next page)

350 Hydraulic Excavator Specifications

Attachments Offering Guide – Commonwealth of Independent States *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match
 * Working range front only
 No Match
 1800 kg/m³ (3,000 lb/yd³)
 1200 kg/m³ (2,000 lb/yd³)

PIN-ON ATTACHMENTS *(continued)*

Undercarriage		Long				
Counterweight		9.0 mt (19,842 lb)				
Boom Type		Reach			Mass	
Stick Length		3.9 m (12'10")	2.9 m (9'6")	3.35 m (11'0")	2.5 m (8'2")	3.0 m (9'10")
Demolition and Sorting Grapples	G345	✓	✓	✓	✓	✓
Mobile Scrap and Demolition Shears	S3050 Flat Top		✓	✓*	✓	✓
Pulverizers	P232 Secondary Pulverizer	✓	✓	✓		
	P332 Primary Pulverizer	✓	✓	✓		
	P332 Primary Pulverizer-Flat Top	✓	✓	✓		
Orange Peel Grapples	GSH455-1000	●	●	●		
	GSH455-1500	●	●	●		
	GSH455-2000	○	●	○		
	GSH555-1000	●	●	●		
	GSH555-1500	○	●	●		
	GSM-50-1000	●	●	●		
	GSM-50-1250	●	●	●		
	GSM-50-1500	○	●	○		
	GSM-50-2000		○	○		
	GSM-60-1250		○	○	●	○
	GSM-60-1500		○		○	○
	GSM-60-2000				○	
Clamshell Grapples	CTV30-1700	●	●	●		
	CTV30-1900	○	●	○		
	CTV30-2300	○	○	○		
	CTV30-2700		○			
	CTV30-2900		○			

(continued on next page)

350 Hydraulic Excavator Specifications

Attachments Offering Guide – Commonwealth of Independent States *(continued)*

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match * Working range front only No Match

CAT PIN GRABBER COUPLER ATTACHMENTS

Undercarriage		Long				
Counterweight		9.0 mt (19,842 lb)				
Boom Type		Reach			Mass	
Stick Length		3.9 m (12'10")	2.9 m (9'6")	3.35 m (11'0")	2.5 m (8'2")	3.0 m (9'10")
Hydraulic Hammers	H160 S	✓	✓	✓	✓	✓
	H180 GC	✓*	✓	✓*	✓	✓*
	H180 GC S	✓	✓	✓	✓	✓
	H180 S	✓*	✓	✓	✓	✓
Multi-Processors	MP332 Concrete Cutter Jaw	✓	✓	✓		
	MP332 Demolition Jaw	✓	✓	✓		
	MP332 Pulverizer Jaw	✓	✓	✓		
	MP332 Shear Jaw	✓	✓	✓		
	MP332 Tank Shear Jaw	✓	✓	✓		
	MP332 Universal Jaw	✓	✓	✓		
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓	✓		
	MP332 Demolition Jaw-Flat Top	✓	✓	✓		
	MP332 Pulverizer Jaw-Flat Top	✓	✓	✓		
	MP332 Shear Jaw-Flat Top	✓	✓	✓		
	MP332 Tank Shear Jaw-Flat Top	✓*	✓	✓*		
	MP332 Universal Jaw-Flat Top	✓	✓	✓		
	MP345 Concrete Cutter Jaw		✓*			✓
	MP345 Demolition Jaw		✓*			✓*
	MP345 Pulverizer Jaw		✓*			✓*
	MP345 Shear Jaw		✓			✓
MP345 Shear Jaw-Flat Top					✓*	
Demolition and Sorting Grapples	G345	✓	✓	✓	✓	✓
Pulverizers	P232 Secondary Pulverizer	✓	✓	✓		
	P332 Primary Pulverizer	✓	✓	✓		
	P332 Primary Pulverizer-Flat Top	✓	✓	✓		

(continued on next page)

350 Hydraulic Excavator Specifications

Attachments Offering Guide – Commonwealth of Independent States (continued)

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

CW-55 DEDICATED COUPLER ATTACHMENTS

Undercarriage		Long				
Counterweight		9.0 mt (19,842 lb)				
Boom Type		Reach			Mass	
Stick Length		3.9 m (12'10")	2.9 m (9'6")	3.35 m (11'0")	2.5 m (8'2")	3.0 m (9'10")
Hydraulic Hammers	H160 S	✓	✓	✓	✓	✓
	H180 GC		✓	✓*	✓	✓
	H180 GC S	✓	✓	✓	✓	✓
	H180 S	✓*	✓	✓	✓	✓
	H190 S		✓*		✓*	
Multi-Processors	MP332 Concrete Cutter Jaw	✓	✓	✓		
	MP332 Demolition Jaw	✓	✓	✓		
	MP332 Pulverizer Jaw	✓	✓	✓		
	MP332 Shear Jaw	✓	✓	✓		
	MP332 Tank Shear Jaw	✓	✓	✓		
	MP332 Universal Jaw	✓	✓	✓		
	MP332 Concrete Cutter Jaw-Flat Top	✓	✓	✓		
	MP332 Demolition Jaw-Flat Top	✓	✓	✓		
	MP332 Pulverizer Jaw-Flat Top	✓	✓	✓		
	MP332 Shear Jaw-Flat Top	✓	✓	✓		
	MP332 Tank Shear Jaw-Flat Top	✓*	✓	✓*		
	MP332 Universal Jaw-Flat Top	✓	✓	✓		
	MP345 Concrete Cutter Jaw		✓	✓*	✓	✓*
	MP345 Demolition Jaw		✓*		✓	✓*
	MP345 Pulverizer Jaw		✓*		✓	✓*
	MP345 Shear Jaw		✓	✓*	✓	✓*
	MP345 Concrete Cutter Jaw-Flat Top		✓*		✓	
	MP345 Demolition Jaw-Flat Top				✓*	
MP345 Pulverizer Jaw-Flat Top				✓*		
MP345 Shear Jaw-Flat Top		✓*		✓		
Demolition and Sorting Grapples	G345	✓	✓	✓	✓	✓
Mobile Scrap and Demolition Shears	S3050 Flat Top				✓*	
Pulverizers	P232 Secondary Pulverizer	✓	✓	✓		
	P332 Primary Pulverizer	✓	✓	✓		
	P332 Primary Pulverizer-Flat Top	✓	✓	✓		

BOOM-MOUNT ATTACHMENTS

Undercarriage		Long	
Counterweight		9.0 mt (19,842 lb)	
Boom Type		Reach	Mass
Mobile Scrap and Demolition Shears	S2090	✓	✓
	S3070 Flat Top	✓	
	S3090 Flat Top	✓*	

350 Hydraulic Excavator Specifications

Attachments Offering Guide – Australia and New Zealand

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

PIN-ON ATTACHMENTS

Undercarriage		Long				
Counterweight		9.0 mt (19,842 lb)				
Boom Type		Reach			Mass	
Stick Length		2.9 m (9'6")	3.35 m (11'0")	3.9 m (12'10")	2.5 m (8'2")	3.0 m (9'10")
Hydraulic Hammers	H160 S	✓	✓	✓	✓	✓
	H180 GC	✓	✓	✓	✓	✓
	H180 GC S	✓	✓	✓	✓	✓
	H180 S	✓	✓	✓	✓	✓
	H190 S	✓	✓	✓*	✓	✓
Demolition and Sorting Grapples	G345	✓	✓	✓	✓	✓
Mobile Scrap and Demolition Shears	S3050 Flat Top	✓	✓*		✓	✓

CAT PIN GRABBER COUPLER ATTACHMENTS

Undercarriage		Long				
Counterweight		9.0 mt (19,842 lb)				
Boom Type		Reach			Mass	
Stick Length		2.9 m (9'6")	3.35 m (11'0")	3.9 m (12'10")	2.5 m (8'2")	3.0 m (9'10")
Hydraulic Hammers	H160 S	✓	✓	✓	✓	✓
	H180 GC	✓	✓	✓*	✓	✓*
	H180 GC S	✓	✓	✓	✓	✓
	H180 S	✓	✓	✓*	✓	✓
Demolition and Sorting Grapples	G345	✓	✓	✓	✓	✓

BOOM-MOUNT ATTACHMENTS

Undercarriage		Long				
Counterweight		9.0 mt (19,842 lb)				
Boom Type		Reach				
Mobile Scrap and Demolition Shears	S3070 Flat Top			✓		
	S3090 Flat Top			✓*		

350 Hydraulic Excavator Specifications

Attachments Offering Guide – South America

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match

* Working range front only

No Match

PIN-ON ATTACHMENTS

Undercarriage		Long	
Counterweight		9.0 mt (19,842 lb)	
Boom Type		Mass	
Stick Length		2.5 m (8'2")	3.0 m (9'10")
Hydraulic Hammers	H160 S	✓	✓
	H180 GC	✓	✓
	H180 GC S	✓	✓
	H180 S	✓	✓
	H190 S	✓	✓
Multi-Processors	MP345 Concrete Cutter Jaw	✓	✓
	MP345 Demolition Jaw	✓	✓
	MP345 Pulverizer Jaw	✓	✓
	MP345 Shear Jaw	✓	✓
	MP345 Concrete Cutter Jaw-Flat Top	✓	✓
	MP345 Demolition Jaw-Flat Top	✓	✓
	MP345 Pulverizer Jaw-Flat Top	✓	✓
Demolition and Sorting Grapples	G345	✓	✓
	Mobile Scrap and Demolition Shears	S3050 Flat Top	✓

CAT PIN GRABBER COUPLER ATTACHMENTS

Undercarriage		Long	
Counterweight		9.0 mt (19,842 lb)	
Boom Type		Mass	
Stick Length		2.5 m (8'2")	3.0 m (9'10")
Hydraulic Hammers	H160 S	✓	✓
	H180 GC	✓	✓*
	H180 GC S	✓	✓
	H180 S	✓	✓
Multi-Processors	MP345 Concrete Cutter Jaw	✓	
	MP345 Demolition Jaw	✓*	
	MP345 Pulverizer Jaw	✓*	
	MP345 Shear Jaw	✓	
	MP345 Shear Jaw-Flat Top	✓*	
Demolition and Sorting Grapples	G345	✓	✓

BOOM-MOUNT ATTACHMENTS

Undercarriage		Long	
Counterweight		9.0 mt (19,842 lb)	
Boom Type		Mass	
Mobile Scrap and Demolition Shears	S2090	✓	

350 Hydraulic Excavator Specifications

Attachments Offering Guide – Southeast Asia

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.

Match
 * Working range front only
 No Match

PIN-ON ATTACHMENTS

Undercarriage		Long			
		9.0 mt (19,842 lb)			
Counterweight		Reach		Mass	
		2.9 m (9'6")	3.35 m (11'0")	2.5 m (8'2")	3.0 m (9'10")
Boom Type					
Stick Length					
Hydraulic Hammers	H160 S				
	H180 GC	✓	✓	✓	✓
	H180 GC S	✓	✓	✓	✓
	H180 S				
	H190 S				

350 Hydraulic Excavator Specifications

Typical Pass Match Guide

For maximum production and efficiency, we recommend that loading and hauling machines are matched to achieve optimal performance.

Configuration*:

Mass boom, M3.0 m (9'10") UB stick, and 3.21 m³ (4.20 yd³) SDV bucket

Passes Required to Fill Trucks to Rated Capacity

Material Type	Material Density	Cat Articulated Trucks							Cat Off-Highway Trucks
		725	730 EJ	730	735	740 GC	740 EJ	745	770G
Earth	1600 kg/m ³ (2,700 lb/yd ³)	4-5	5-6	5-6	6	7	7-8	8	7-8
Limestone	1540 kg/m ³ (2,600 lb/yd ³)	5-6	6	6	7	8			

*The indicated pass match reflects the machine configuration, fill factor, and typical material density shown. Changes to machine configurations, fill factors, or material density as well as jobsite-specific factors may influence exact pass match recommendations for your application. Consult your Cat dealer for more information.

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
BOOMS, STICKS AND LINKAGES			ELECTRICAL SYSTEM		
6.55 m (21'6") Mass boom		✓	Maintenance-free 1,000 CCA batteries (×2)	✓	
6.9 m (22'8") Reach boom		✓	Centralized electrical disconnect switch	✓	
2.5 m (8'2") Mass stick		✓	LED exterior chassis and boom lights	✓	
2.9 m (9'6") Reach stick		✓	Premium surround working lights		✓
3.0 m (9'10") Mass stick		✓	ENGINE		
3.35 m (11'0") Reach stick		✓	115 Amp alternator	✓	
3.9 m (12'10") Reach stick		✓	Cold start block heaters		✓
UB family bucket linkage with lifting eye		✓	Three selectable modes: Power, Smart, Eco	✓	
TB family bucket linkage with lifting eye		✓	Auto engine speed control	✓	
CAT TECHNOLOGY			52° C (126° F) high-ambient cooling	✓	
Cat Product Link™	✓		Hydraulic reverse fan		✓
Remote flash	✓		-18° C (0° F) cold start capability	✓	
Remote troubleshoot	✓		-32° C (-25° F) cold start capability		✓
Cat Grade connectivity		✓	Double element air filter with integrated pre-cleaner	✓	
Compatibility with radios and base stations from Trimble, Topcon, and Leica	✓		Dual stage four micron main filter	✓	
Capability to install 3D grade systems from Trimble, Topcon, and Leica	✓		10 micron primary filter with water separator	✓	
Cat Grade with 2D and offset memory	✓		Electric fuel priming pump	✓	
Cat Grade with Advanced 2D		✓	Secure start with PIN code	✓	
Cat Grade with 3D		✓	Remote disable	✓	
Cat Assist:		✓	HYDRAULIC SYSTEM		
– Grade Assist			Boom and stick regeneration circuit	✓	
– Boom Assist			Electronic main control valve	✓	
– Bucket Assist			Auto hydraulic oil warmup	✓	
– Swing Assist			Auto dig boost		✓
– Lift Assist			Auto heavy lift	✓	
Cat Payload:		✓	Bio hydraulic oil capability	✓	
– Static weigh			Fine swing		✓**
– Semiautomatic calibration			Reverse swing damping valve	✓	
– Payload/cycle information			Auto swing parking brake	✓	
– USB reporting capability			High performance hydraulic return filter	✓	
2D E-Fence:		✓	Two speed travel	✓	
– E-ceiling			One-way auxiliary circuit		✓
– E-floor			Combined two-way auxiliary circuit		✓
– E-swing			Combined two-way auxiliary circuit with hammer return filter		✓
– E-wall			Medium-pressure auxiliary circuit		✓
– E-cab avoidance			Quick coupler circuit for Cat Pin Grabber		✓
Auto hammer stop	✓		Quick coupler circuit for CW dedicated		✓
Laser catcher		✓			
Work tool recognition		✓			
Work tool tracking*		✓			

*Requires PL161 attachment locator on work tool and Bluetooth® receiver on machine.

**Optional Africa, Middle East only

(continued on next page)

350 Standard and Optional Equipment

Standard and Optional Equipment *(continued)*

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
SAFETY AND SECURITY			UNDERCARRIAGE AND STRUCTURES		
Caterpillar One Key security system	✓		Long undercarriage	✓	
Lockable external tool/storage box	✓		Towing eye on base frame	✓	
Lockable door, fuel, and hydraulic tank locks	✓		Full-length track guiding guards		✓
Lockable fuel drain compartment	✓		Segmented two-piece track guiding guards		✓
Service platform with anti-skid plate and recessed bolts	✓		Swivel guard	✓	
RH handrail and handhold	✓		HD bottom guard	✓	
Signaling/warning horn	✓		HD travel motor guards	✓	
Ground-level secondary engine shutoff switch	✓		Grease lubricated track	✓	
Rearview camera	✓		HD swing frame	✓	
Right-hand-sideview camera		✓	HD swing bearing	✓	
360° visibility		✓	9 mt (19,842 lb) counterweight	✓	
Falling object guard system		✓	600 mm (24") double grouser, HD double grouser track shoes		✓
Inspection lighting		✓	750 mm (30") triple grouser shoes		✓
SERVICE AND MAINTENANCE			900 mm (35") triple grouser shoes		✓
Grouped engine oil and fuel filters	✓				
Scheduled Oil Sampling (S-O-S SM) ports	✓				
Electric refueling pump with auto shutoff		✓			
QuickEvac TM maintenance ready		✓			

Dealer Installed Kits and Attachments

Attachments may vary. Consult your Cat dealer for details.

CAB <ul style="list-style-type: none">• Radial lower wiper• LH/RH electrical pedal for tool control• Dual exit rear window kit• Rain protector plus cab light cover• 75 mm (3") retractable seat belt	ELECTRICAL <ul style="list-style-type: none">• Premium surround working lights GUARDS <ul style="list-style-type: none">• Side rubber bumper guard• Mesh guard full front• Mesh guard half front• Full protecting vandalism guard	SAFETY AND SECURITY <ul style="list-style-type: none">• Bluetooth receiver kit• Bluetooth key fob• Falling object guard system
--	--	---

350 Cab Options

	Essential	Deluxe
ROPS	○	●
High-resolution 203 mm (8") LCD touchscreen monitor	●	●
High-resolution 254 mm (10") LCD touchscreen monitor	○	○
Auto bi-level air conditioner	●	●
Jog dial and shortcut keys for monitor control	X	●
Keyless push-to-start engine control	●	●
Height-adjustable console	X	●
Tilt-up left-side console	X	●
Air-suspension seat	●	X
Heated air-suspension seat	X	●
51 mm (2") seat belt	●	●
Monitor integrated Bluetooth radio with USB/Aux ports	X	●
Bluetooth radio with USB/Aux ports	●	X
12V DC outlets	X	●
24V DC outlet	●	X
Document storage	X	●
Overhead storage and rear storage with nets	X	●
Beverage holder	●	●
Cup holder	X	●
Openable two-piece front window	●	●
Rear window emergency exit	●	●
Radial wiper with washer	●	●
Openable polycarbonate skylight hatch	X	●
Openable steel hatch	●	X
LED dome light	●	●
Floor welcome light	X	●
Roof sunscreen	X	●
Roller front sunscreen	●	●
Roller rear sunscreen	○	○
Washable floor mat	●	●
Beacon ready	X	●
Cat Stick Steer	X	○

- Standard
- Optional
- X Not available

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2022 Caterpillar
All rights reserved

AEXQ3476 (06-2022)
Build Number: 06A
(Afr-ME, Aus-NZ,
CIS, S Am, SE Asia)

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

